



UNILOCK®

2025
**PRODUCT
DATA**

T R A N S F O R M I N G H A R D S C A P E S

ELEVATE YOUR CRAFT WITH **U**VISION 3D LANDSCAPE CREATOR.



UVISION ALLOWS YOU TO VISUALLY
COMMUNICATE YOUR DESIGN IDEAS
TO YOUR CLIENT IN BOTH 2D PLAN
VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator** is an easy-to-use software that helps bring your designs ideas to life.



Scan the QR code
for more information
or to download a free
30-day trial.

UVISION[®]
— 3D LANDSCAPE CREATOR —

TABLE OF CONTENTS

PAVERS

Arcana™	4
Artline™	5
Artline™ Umbriano Finish	6
Beacon Hill™ Flagstone	7
Beacon Hill™ Smooth	8
Boulevard™	10
Bristol Valley™	11
Brussels Block®	12
Camelot™	14
Copthorne®	15
Courtstone®	16
Eco-Hex™	17
Eco-Line®	18
Eco-Optiloc™	19
Eco-Priora™	20
Eco-Promenade®	21
Granito™	24
Hex™	25
Holland Premier™	26
Hollandstone™	27
Il Campo®	28
Mattoni™	29
Natural Stone	30
Nordic Cobble™	38
Optiloc®	39
Porcelain	40
Promenade™	42
Richcliff®	44
Series™	45
Skyline™	46
Soreno™	47
Thornbury™	48
Town Hall®	49
Treo® Premier	50

Treo® Smooth	51
Tribeca Cobble™	52
Turfstone™	53
Umbriano®	54
Urban™	60
Westport™	62

RETAINING WALLS

Brussels Dimensional Stone™	63
DuraHold®	64
DuraHold2®	66
Estate Wall™	67
Lineo™ Dimensional Stone	68
Olde Quarry™	69
Pisa™ & Pisa XL	70
Pisa™ XL Smooth	71
Quarry™ Smooth	72
Rivercrest®	73
SienaStone™	75
SienaEdge™	76
Split'nStack™	77
U-Cara®	78

COPING, STEPS, PILLAR CAPS

Architectural Coping	85
Beacon Hill™ Coping	86
Brussels Fullnose™ & Double Fullnose	87
Ledgestone™	88
SienaStone™ Step	90
Umbriano Coping	91
Universal Coping	92
Urban™ Coping	92

FIRE FEATURES

Sunset Fire Pit	94
Unilock Elements	95

ACCESSORIES

Skyview	96
Paver Cleaners	97
Natural Stone Cleaners	97
Natural Stone Sealers	97
Sealers	97
Sands	98
Adhesive, Edging	100
Edge Restraints, Drainage	101
Tools & Accessories	102
Base Systems	102

PRODUCT & INSTALLATION INFORMATION

Calculations	103
Bedding & Base Thickness Charts	104
Finishes	105
Quality Commitment	106
Important Notes	108
Product Directory	109

DESCRIPTION OF EDGE DETAILS



Zero-Edge



Chamfered Edge



Rounded Bevel



Micro Bevel

**APPLICATIONS**

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 0 mm

TECHNICAL INFORMATION

Conforms to ASTM C 1782

Eligible for LEED v4.1 credits

// Perfect for roof decks and other raised floor applications.


Ask us about our Skyview™ pedestal system

SLAB SPACERS




X & T Slab Spacers
Bagged & Sold Separately.

LAYING PATTERNS



Random A



Random C

SINGLE UNITS



12 x 24
301 x 606 x 50mm
11⁷/₈ x 23⁷/₈ x 2"
18 Units/Bundle
2 Sq.Ft./Stone



18 x 24
453 x 606 x 50mm
17⁷/₈ x 23⁷/₈ x 2"
18 Units/Bundle
3 Sq.Ft./Stone



24 x 24
606 x 606 x 50mm
23⁷/₈ x 23⁷/₈ x 2"
18 Units/Bundle
4 Sq.Ft./Stone

	12 x 24	18 x 24	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50 mm	50 mm	50 mm

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	2.00	3.00	4.00
	Sections	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	18.00	18.00	18.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.99	0.99	0.99
	Sections	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	35.55	53.50	71.57

SAILOR LNFT PER	SqFt	1.99	1.33	0.99
	Sections	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	71.57	71.57	71.57

UNITS PER	SqFt	0.50	0.33	0.25
	Sections	-	-	-
	Bundle	18.00	18.00	18.00

LBS PER	Layer	48	72	96
	Sections	-	-	-
	Bundle	864	1,296	1,728

Colors	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	✓	✓	✓
Corvara	SR .32 SRI 34	✓	✓	✓
Modena	SR .46 SRI 53	✓	✓	✓
Vivanto	SR .18 SRI 16	✓	✓	✓



Notes: Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. **Product is not intended for vehicular applications.** All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth / Brushed (Il Campo®)


Joint Spacing - 3 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



Artline Random A

7 UNIT RANDOM BUNDLE

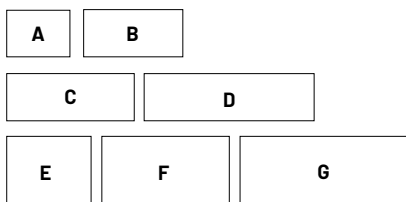

UNIT A

125 x 169 x 70mm
4 7/8 x 6 7/8 x 2 3/4"
32 Units/Bundle
.23 Sq.Ft./Stone

UNIT E

187.5 x 225 x 70mm
7 3/8 x 8 7/8 x 2 3/4"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT B

125 x 262.5 x 70mm
4 7/8 x 10 3/8 x 2 3/4"
32 Units/Bundle
.35 Sq.Ft./Stone

UNIT F

187.5 x 337.5 x 70mm
7 3/8 x 13 3/8 x 2 3/4"
16 Units/Bundle
.58 Sq.Ft./Stone

UNIT C

125 x 337.5 x 70mm
4 7/8 x 13 1/4 x 2 3/4"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT G

187.5 x 450 x 70mm
7 3/8 x 17 1/4 x 2 3/4"
16 Units/Bundle
.91 Sq.Ft./Stone

UNIT D

125 x 450 x 70mm
4 7/8 x 17 3/4 x 2 3/4"
32 Units/Bundle
.61 Sq.Ft./Stone

Bundle Type	RANDOM
Plant Produced	RITTMAN
Thickness (mm)	70 mm

SQFT PER	Bundle	93.25
	Layer	11.66
	Section	-
	Stone	0.49

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.06
	Section	-
	Bundle	192.00

LBS PER	Layer	364
	Section	-
	Bundle	2,911

Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Granite Fusion (Il Campo)	SR .28 SRI 29	✓





APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro

Surface Texture - Umbriano Mottled

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	AYR
Thickness (mm)	80 mm

SQFT PER	Bundle	81.61
	Layer	11.66
	Sections	-
	Stone	0.42

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.40
	Sections	-
	Bundle	196.00


LBS PER	Layer	427
	Sections	-
	Bundle	2,986

Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓

LAYER CONFIGURATION




LAYING PATTERNS



Artline Random A

7 UNIT RANDOM BUNDLE

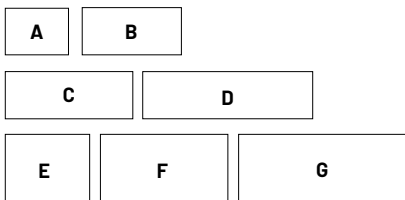

UNIT A

125 x 169 x 80mm
4 7/8 x 6 3/4 x 3 1/8"
32 Units/Bundle
.23 Sq.Ft./Stone

UNIT B

125 x 262.5 x 80mm
4 7/8 x 10 3/8 x 3 1/8"
32 Units/Bundle
.35 Sq.Ft./Stone

UNIT C

125 x 337.5 x 80mm
4 7/8 x 13 3/8 x 3 1/8"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT D

125 x 450 x 80mm
4 7/8 x 17 3/4 x 3 1/8"
32 Units/Bundle
.61 Sq.Ft./Stone

UNIT E

187.5 x 225 x 80mm
7 1/2 x 8 7/8 x 3 1/8"
32 Units/Bundle
.45 Sq.Ft./Stone

UNIT F

187.5 x 337.5 x 80mm
7 1/2 x 13 3/8 x 3 1/8"
16 Units/Bundle
.58 Sq.Ft./Stone

UNIT G

187.5 x 450 x 80mm
7 1/2 x 17 3/4 x 3 1/8"
16 Units/Bundle
.91 Sq.Ft./Stone



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type		RANDOM	RANDOM
Plant Produced		OHIO	OHIO
Thickness (mm)		60 mm	80 mm

SQFT PER	Bundle	116.57	73.22
	Layer	11.66	10.46
	Section	-	-
	Stone	1.46	1.31

PER BUNDLE	Layers	10.00	7.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	0.80	0.85
	Section	-	-
	Layer	9.35	8.86
	Bundle	93.50	62.00

UNITS PER	SqFt	0.69	0.76
	Section	-	-
	Bundle	80.00	56.00


LBS PER	Layer	320	362
	Section	-	-
	Bundle	3,199	2,548

Colors	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	S0
Fossil	SR n/a SRI n/a	✓	S0
Granite Fusion	SR n/a SRI n/a	✓	S0
River Blend	SR n/a SRI n/a	✓	S0
Sierra	SR n/a SRI n/a	✓	S0


LAYER CONFIGURATION




LAYING PATTERNS



BH Fixed Random A




BH Fixed Random B



BH Multi-Unit Random C



3 UNIT RANDOM BUNDLE



LARGE RECTANGLE

380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle

LARGE RECTANGLE

380 x 570 x 80mm
15 x 22 1/2 x 2 3/8"
14 Units/Bundle

SQUARE

380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle

SQUARE

380 x 380 x 80mm
15 x 15 x 2 3/8"
21 Units/Bundle

SMALL RECTANGLE

380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle

SMALL RECTANGLE

380 x 190 x 80mm
15 x 7 1/2 x 2 3/8"
21 Units/Bundle

Notes: Special Order (S0). Minimum quantities apply. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded



Surface Texture - Smooth

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits

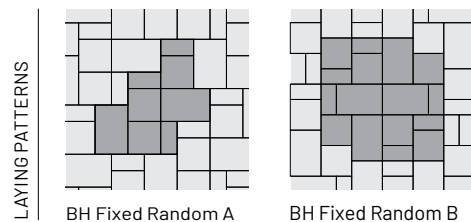

SLAB
900 x 570 x 60mm
37 1/2 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.00 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
135 Units/Bundle
.78 Sq.Ft./Stone



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle

SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle

SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle

		SLAB	SMALL RECTANGLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	OHIO	HARRISON	OHIO
Thickness (mm)	60 mm	60 mm	60 mm

SQFT PER	Bundle	116.57	104.6	116.57
	Layer	11.66	10.46	11.66
	Section	-	-	-
	Stone	1.46	2.00	0.78

PER BUNDLE	Layers	10.00	10.00	10.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	0.34	0.80
	Section	-	-	-
	Layer	-	3.54	9.35
	Bundle	-	35.43	93.50

SAILOR LNFT PER	SqFt	0.80	0.56	1.60
	Section	-	-	-
	Layer	9.35	5.90	18.70
	Bundle	93.50	59.05	187.01

UNITS PER	SqFt	0.69	0.19	1.29
	Section	-	-	-
	Bundle	80.00	20.00	150.00

LBS PER	Layer	320	292.8	320
	Section	-	-	-
	Bundle	3,199	2,928	3,199

Colors	Reflectance	Stock	Stock	Stock
Bavarian Blend	SR n/a SRI n/a	✓	✓	-
Dark Charcoal	SR n/a SRI n/a	-	-	✓
Fossil	SR n/a SRI n/a	✓	✓	✓
Granite Fusion	SR n/a SRI n/a	✓	✓	✓
River Blend	SR n/a SRI n/a	✓	✓	-
Oat Beige	SR n/a SRI n/a	✓	✓	✓
Opal Blend	SR n/a SRI n/a	✓	✓	✓



Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type		RANDOM
Plant Produced		OHIO
Thickness (mm)		80 mm

SQFT PER	Bundle	73.22
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	7.00
	Sections	-



SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Section	-
	Layer	8.86
	Bundle	62.00

UNITS PER	SqFt	0.76
	Section	-
	Bundle	56.00

LBS PER	Layer	362
	Section	-
	Bundle	2,548

Colors	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	S0
Fossil	SR n/a SRI n/a	S0
Granite Fusion	SR n/a SRI n/a	S0
River Blend	SR n/a SRI n/a	S0
Oat Beige	SR n/a SRI n/a	S0
Opal Blend	SR n/a SRI n/a	S0



LARGE RECTANGLE
380 x 570 x 80mm
15 x 22 1/2 x 3 1/8"
14 Units/Bundle

SQUARE
380 x 380 x 80mm
15 x 15 x 3 1/8"
21 Units/Bundle

SMALL RECTANGLE
380 x 190 x 80mm
15 x 7 1/2 x 3 1/8"
21 Units/Bundle



Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	HARRISON
Thickness (mm)	70 mm

SQFT PER	Bundle	93.00
	Layer	11.63
	Section	-
	Stone	1.45

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	1.03
	Section	-
	Layer	12.00
	Bundle	96.04

UNITS PER	SqFt	0.69
	Section	-
	Bundle	64.00

LBS PER	Layer	372
	Section	-
	Bundle	2,978

Colors	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

LAYING PATTERNS



Boulevard Fixed
Random B



3 UNIT RANDOM BUNDLE



LARGE RECTANGLE
610 x 305 x 70mm
24 x 12 x 2 3/4"
24 Units/Bundle
2.00 SqFt/Stone

MEDIUM RECTANGLE
457 x 305 x 70mm
18 x 12 x 2 3/4"
16 Units/Bundle
1.50 Sq.Ft./Stone

SQUARE
305 x 305 x 70mm
12 x 12 x 2 3/4"
24 Units/Bundle
1.00 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

**APPLICATIONS**

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		SLAB
Bundle Type	RANDOM	SINGLE
Plant Produced	HARRISON	MARENGO
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	116.57	116.57
	Layer	11.66	11.66
	Section	-	-
	Stone	1.46	5.83

PER BUNDLE	Layers	10.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.32
	Section	-	-
	Layer	-	3.74
	Bundle	-	37.40


SAILOR LNFT PER	SqFt	0.80	0.53
	Section	-	-
	Layer	9.35	6.23
	Bundle	93.50	62.30

UNITS PER	SqFt	0.69	0.17
	Section	-	-
	Bundle	80.00	20.00


LBS PER	Layer	311	321
	Section	-	-
	Bundle	3,113	3,210

Colors	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Steel Mountain	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION



LAYING PATTERNS




BV Fixed Random A



BV Fixed Random B



3 UNIT RANDOM BUNDLE




LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.08 SqFt./Stone

SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 Units/Bundle
1.39 Sq.Ft./Stone

SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 Units/Bundle
.69 Sq.Ft./Stone

SINGLE UNIT



XL UNIT
950 x 570 x 60mm
37 1/2 x 22 1/2 x 2 3/8"
20 Units/Bundle
5.83 Sq.Ft./Stone

Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Brussels Block® Rittman



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	RITTMAN
Thickness (mm)	70 mm	70 mm	70 mm

SQFT PER	Bundle	88.70	88.60	76.56
	Layer	11.09	11.08	9.57
	Section	-	-	-
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	8.00	8.00	8.00
	Sections	-	-	-



SOLDIER LNFT PER	SqFt	1.72	1.44	0.86
	Section	-	-	-
	Layer	19.11	15.98	8.19
	Bundle	152.86	127.87	65.51

SAILOR LNFT PER	SqFt	2.87	1.73	1.43
	Section	-	-	-
	Layer	31.78	19.11	13.70
	Bundle	254.28	152.86	109.61

UNITS PER	SqFt	5.05	2.53	1.25
	Section	-	-	-
	Bundle	448.00	224.00	96.00

LBS PER	Layer	344	344	316
	Section	-	-	-
	Bundle	2,752	2,749	2,528

Colors	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
River	SR .28 SRI 29	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

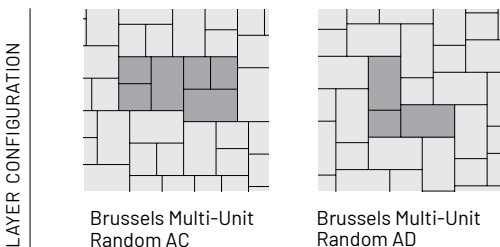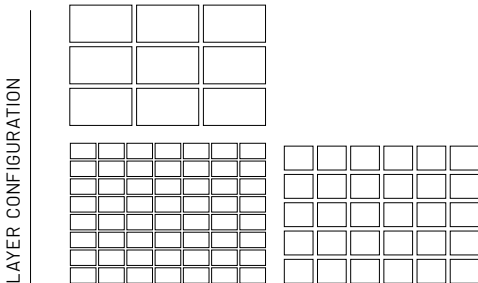

SINGLE UNITS	HALF 104 x 173 x 70mm 4 x 6 7/8 x 2 3/4" 448 Units/Bundle .20 Sq.Ft./Stone	STANDARD 173 x 208 x 70mm 6 7/8 x 8 1/4 x 2 3/4" 224 Units/Bundle .40 Sq.Ft./Stone	XL 208 x 348 x 70mm 8 1/4 x 13 3/4 x 2 3/4" 96 Units/Bundle .80 Sq.Ft./Stone



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Brussels Block® Harrison



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON	HARRISON
Thickness (mm)	70 mm	70 mm	70 mm

SQFT PER	Bundle	113.68	110.75	76.56
	Layer	11.36	11.07	9.57
	Section	-	-	-
	Stone	-	0.40	0.80

PER BUNDLE	Layers	10.00	10.00	10.00
	Sections	-	-	-




SOLDIER LNFT PER	SqFt	-	1.44	0.86
	Section	-	-	-
	Layer	-	15.98	8.19
	Bundle	-	159.84	65.51

SAILOR LNFT PER	SqFt	-	1.73	1.43
	Section	-	-	-
	Layer	-	19.10	13.70
	Bundle	-	191.07	109.61

UNITS PER	SqFt	-	2.53	1.25
	Section	-	-	-
	Bundle	-	280.00	120.00

LBS PER	Layer	352	343	316
	Section	-	-	-
	Bundle	3,526	3,436	2,528

Colors	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	✓
River	SR .28 SRI 29	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓

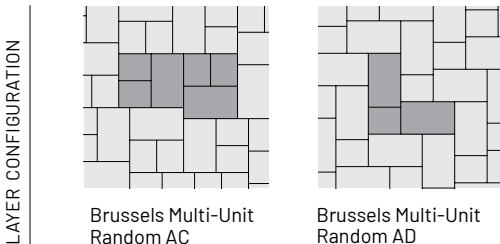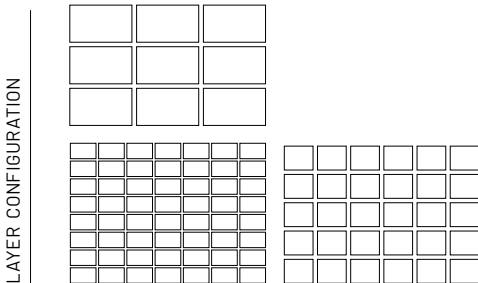

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	SQUARE	RECTANGLE	SQUARE	RECTANGLE
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	HARRISON	HARRISON
Thickness (mm)	60 mm	60 mm	60 mm	60 mm

SQFT PER	Bundle	92.40	98.96	115.50	123.7
	Layer	11.55	12.37	11.55	12.37
	Section	-	-	-	-
	Stone	0.28	0.41	0.28	0.41

PER BUNDLE	Layers	8.00	8.00	10.00	10.00
	Sections	-	-	-	-



SOLDIER LNFT PER	SqFt	1.79	1.19	1.79	1.19
	Section	-	-	-	-
	Layer	20.67	14.76	20.66	14.76
	Bundle	165.35	118.11	206.69	147.64

SAILOR LNFT PER	SqFt	1.79	1.79	1.79	1.79
	Section	-	-	-	-
	Layer	20.67	22.15	20.66	22.14
	Bundle	165.35	177.17	206.69	221.45


UNITS PER	SqFt	3.64	2.43	3.64	2.43
	Section	-	-	-	-
	Bundle	336.00	240.00	420.00	300.00

LBS PER	Layer	325	350	325	350
	Section	-	-	-	-
	Bundle	2,598	2,800	3,250	3,500


LAYER CONFIGURATION



LAYING PATTERNS



Camelot 6x9
Random RB



Camelot 6x9 HB

Colors	Reflectance	Stock	Stock	Stock	Stock
Granite	SR .26 SRI 27	✓	✓	✓	✓
River	SR .32 SRI 34	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓



SINGLE UNIT

RITTMAN



SQUARE

159.8 x 159.8 x 60mm
6 3/8 x 6 3/8 x 2 3/8"
336 Units/Bundle
.28 Sq.Ft./Stone

RECTANGLE

160 x 240 x 60mm
6 3/8 x 9 1/2 x 2 3/8"
240 Units/Bundle
.41 Sq.Ft./Stone

SINGLE UNIT

HARRISON



SQUARE

159.8 x 159.8 x 60mm
6 3/8 x 6 3/8 x 2 3/8"
420 Units/Bundle
.28 Sq.Ft./Stone

RECTANGLE

160 x 240 x 60mm
6 3/8 x 9 1/2 x 2 3/8"
240 Units/Bundle
.41 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	60 mm

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-


SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

Colors	Reflectance	Stock
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Arctic Grey	SR n/a SRI n/a	✓
Steel Blue	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓

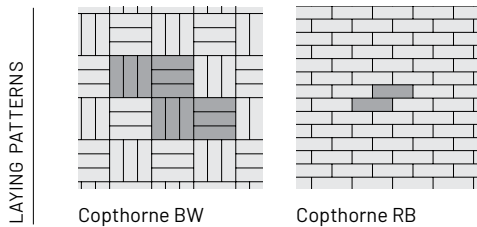

SINGLE UNIT	STANDARD
	65 x 200 x 60mm
	2 5/8 x 7 7/8 x 2 3/8"
	600 Units/Bundle
	.15 SqFt/Stone



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

Joint Spacing - 15 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	AYR
Thickness (mm)	60 mm

SQFT PER	Bundle	98.30
	Layer	12.29
	Section	-
	Stone	0.26

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.25
	Section	-
	Layer	27.69
	Bundle	221.52

UNITS PER	SqFt	3.91
	Section	-
	Bundle	384.00

LBS PER	Layer	291
	Section	-
	Bundle	2,326

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Belgian Blue	SR n/a SRI n/a	✓
Dawn Mist	SR n/a SRI n/a	✓
Pebble Taupe	SR n/a SRI n/a	✓


LAYING PATTERNS



Courtstone Fixed
Random A



5 UNIT RANDOM BUNDLE



XL RECTANGLE
215 x 130 x 60mm
8 3/8 x 5 1/8 x 2 3/8"
128 Units/Bundle
.30 SqFt/Stone

LARGE RECTANGLE
185 x 130 x 60mm
7 1/4 x 5 1/8 x 2 3/8"
64 Units/Bundle
.28 SqFt/Stone

RECTANGLE
165 x 130 x 60mm
6 1/2 x 5 1/8 x 2 3/8"
64 Units/Bundle
.23 SqFt/Stone

SQUARE
130 x 130 x 60mm
5 1/8 x 5 1/8 x 2 3/8"
64 Units/Bundle
.18 SqFt/Stone

SMALL RECTANGLE
145 x 130 x 60mm
5 3/4 x 5 1/8 x 2 3/8"
64 Units/Bundle
.20 SqFt/Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 80. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail Umbriano- Zero
Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1

	8 x 8
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	60 mm

SQFT PER	Bundle	108.31
	Layer	10.83
	Sections	-
	Stone	0.45

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.22
	Layer	24
	Bundle	240.00


LBS PER	Layer	276
	Sections	-
	Bundle	2,762

Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	✓

LAYER CONFIGURATION




LAYING PATTERNS



Hex Paver A

SINGLE UNIT



8 x 8
200 x 200 x 60mm
7 7/8 x 7 7/8 x 2 3/8"
240 Units/Bundle
.45 SqFt/Stone



**APPLICATIONS**

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty,
Permeable


APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 7 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936 -Eligible for LEED v4.1 credits

LAYER CONFIGURATION

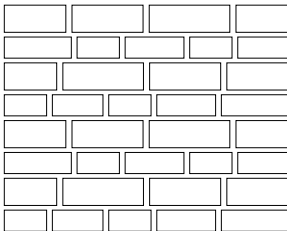


LAYING PATTERNS



Ecoline Fixed
Random A

8 UNIT RANDOM BUNDLE

**UNIT A**

357 x 84 x 100mm
14 x 3 3/8 x 3 3/8"
24 Units/Bundle
.32 SqFt/Stone

UNIT B

317 x 84 x 100mm
12 1/2 x 3 3/8 x 3 3/8"
24 Units/Bundle
.29 SqFt/Stone

UNIT C

277 x 84 x 100mm
10 7/8 x 3 3/8 x 3 3/8"
24 Units/Bundle
.25 SqFt/Stone

UNIT D

237 x 84 x 100mm
9 3/8 x 3 3/8 x 3 3/8"
24 Units/Bundle
.21 SqFt/Stone

UNIT E

357 x 114 x 100mm
14 x 4 1/2 x 3 3/8"
24 Units/Bundle
.44 SqFt/Stone

UNIT F

317 x 114 x 100mm
12 1/2 x 4 1/2 x 3 3/8"
24 Units/Bundle
.39 SqFt/Stone

UNIT G

277 x 114 x 100mm
10 7/8 x 4 1/2 x 3 3/8"
24 Units/Bundle
.34 SqFt/Stone

UNIT H

237 x 114 x 100mm
9 3/8 x 4 1/2 x 3 3/8"
24 Units/Bundle
.29 SqFt/Stone

SMOOTH ENDURA	
Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	100 mm

SQFT PER	Bundle	66.20
	Layer	11.03
	Section	-
	Stone	0.34

PER BUNDLE	Layers	6.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.90
	Section	-
	Bundle	192.00

LBS PER	Layer	504
	Section	-
	Bundle	3,025

Colors	Reflectance	Stock
All Colors & Finishes	SR n/a SRI n/a	SO



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty,
Permeable

APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	STANDARD
Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	80 mm

SQFT PER	Bundle	84.80
	Layer	10.60
	Section	-
	Stone	0.50

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.98
	Section	-
	Bundle	168.00


LBS PER	Layer	354
	Section	-
	Bundle	2,831

Colors	Reflectance	Stock
Charcoal	SR .30 SRI 32	✓
Natural	SR .30 SRI 32	✓
River	SR .32 SRI 34	✓

LAYER CONFIGURATION

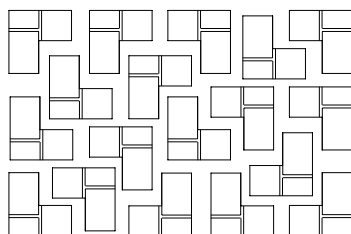


LAYING PATTERNS



EcoOptiloc Cluster A

SINGLE UNITS



STANDARD
250 x 250 x 80mm
9 7/8 x 9 7/8 x 3 1/8"
168 Units/Bundle
.50 Sq.Ft./Stone



**APPLICATIONS**

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth


Joint Spacing - 7 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION

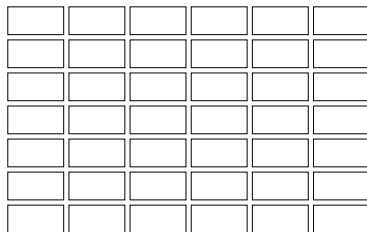

LAYING PATTERNS



EcoPriora 5x10 HB

SINGLE UNITS

**5 x 10**

120 x 240 x 80mm

4 3/4" x 9 1/2" x 3 1/8"

245 Units/Bundle

.31 SqFt/Stone

	5 x 10	5 x 10
Bundle Type	SINGLE	SINGLE
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	80 mm	80 mm

SQFT PER	Bundle	75.95	86.8
	Layer	10.85	10.85
	Section	-	-
	Stone	0.31	0.31

PER BUNDLE	Layers	7.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.27	1.27
	Section	-	-
	Layer	13.78	13.78
	Bundle	96.46	110.24

SAILOR LNFT PER	SqFt	2.25	2.25
	Section	-	-
	Layer	24.41	24.41
	Bundle	170.87	195.27

UNITS PER	SqFt	3.23	3.23
	Section	-	-
	Bundle	245.00	280.00

LBS PER	Layer	381	373.5
	Section	-	-
	Bundle	2,614	2,988

Colors	Reflectance	Stock	Stock
River	SR .32 SRI 34	✓	✓
All others Colors & Finishes	SR n/a SRI n/a	S0	S0



Notes: Special Order (S0). Lead time is required, minimum quantities apply. River is available in 5x10 as a stock item. **5x10 bundles contain 56 5x5 units and 217 5x10 units combined total sq.ft. is 75.95. **Important:** A urethane rubber paver mat must be used to prevent scuffing. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Shot Blasted

Joint Spacing - n/a

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	80 mm

SQFT PER	Bundle	81.37
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	3.00
	Section	-
	Layer	11.81
	Bundle	82.67


SAILOR LNFT PER	SqFt	0.32
	Section	-
	Layer	35.43
	Bundle	248.03

UNITS PER	SqFt	3.09
	Layer	36
	Bundle	252


LBS PER	Layer	360
	Section	-
	Bundle	2,516

Colors	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	SO
Light Steel Gray	SR n/a SRI n/a	SO

LAYING PATTERNS



Eco-Promenade
4x12 RB



Eco-Promenade
4x12 HB

SINGLE UNIT



4 x 12
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
252 units/Bundle
.32 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal.
Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail - Micro
Surface Texture - Il Campo Brushed
Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 mm

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49


SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00


LBS PER	Layer	426
	Section	-
	Bundle	3,404

Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	✓


LAYER CONFIGURATION



LAYING PATTERN



EcoPromenade
4x12 HB



EcoPromenade
4x12 RB

SINGLE UNIT



4 x 12 PERMEABLE
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Edge Detail - Rounded
Surface Texture - Smooth / Series™ Exposed
Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	6 x 24 SMOOTH	3 x 12 PERMEABLE SMOOTH	3 x 12 PERMEABLE SERIES	4 x 12 SERIES
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	70 mm	100 mm	100 mm	80 mm

SQFT PER	Bundle	93.00	63.94	63.94	93.04
	Layer	11.63	10.66	10.66	11.63
	Section	-	-	-	-
	Stone	0.97	0.24	0.24	0.32

PER BUNDLE	Layers	8.00	6.00	6.00	8.00
	Sections	-	-	-	-

SOLDIER LNFT PER	SqFt	0.51	1.02	1.02	1.02
	Section	-	-	-	-
	Layer	5.91	10.83	10.83	11.81
	Bundle	47.25	64.96	64.96	94.49


SAILOR LNFT PER	SqFt	2.03	4.06	4.06	3.05
	Section	-	-	-	-
	Layer	23.62	43.31	43.31	35.43
	Bundle	188.98	259.84	259.84	283.46

UNITS PER	SqFt	1.03	4.13	4.13	3.10
	Section	-	-	-	-
	Bundle	96.00	264.00	264.00	288.00


LBS PER	Layer	372	465	483	426
	Section	-	-	-	-
	Bundle	2,978	2,789	2,898	3,404

Colors	Reflectance	Stock	Stock	Stock	Stock
All Finishes/Colors	SR n/a SRI n/a	SO	SO	SO	SO

LAYING PATTERNS



EcoPromenade
3x12 RB



EcoPromenade
3x12 HB



SINGLE UNITS



3 x 12 SMOOTH
75 x 300 x 100mm
3 x 11 1/2 x 3 7/8"
264 Units/Bundle
.24 Sq.Ft./Stone



3 x 12 SERIES
75 x 300 x 100mm
3 x 11 1/2 x 3 7/8"
264 Units/Bundle
.24 Sq.Ft./Stone



4 x 12 SERIES
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
.32 Sq.Ft./Stone



6 x 24 SMOOTH
150 x 600 x 70mm
5 7/8 x 6 3/8 x 2 3/4"
96 Units/Bundle
.97 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Rounded

Surface Texture - Granito/Granito Textured (Random)


Joint Spacing - 7 mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits


LAYER CONFIGURATION

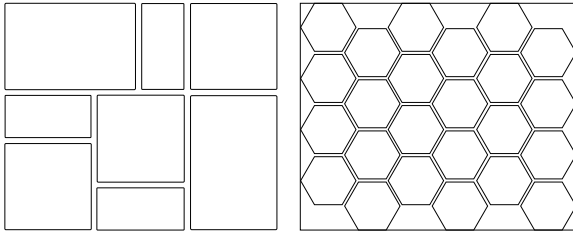


LAYING PATTERNS



Granito Hex A




Granito Fixed Random A



Pattern Random B

3-UNIT RANDOM BUNDLE



SMALL RECTANGLE

180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 Units/Bundle
.655 Sq.Ft./Stone


SQUARE

360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 Units/Bundle
1.31 Sq.Ft./Stone

LARGE RECTANGLE

360 x 540 x 60mm
14 1/4 x 21 1/4 x 2 3/8"
18 Units/Bundle
1.966 Sq.Ft./Stone

SINGLE UNIT



HEX

200 x 200 x 70mm
7 7/8 x 7 7/8 x 3 1/8"
192 Units/Bundle
.42 Sq.Ft./Stone

		HEX
Bundle Type	RANDOM	SINGLE
Plant Produced	PICKERING	PICKERING
Thickness (mm)	60 mm	70 mm

SQFT PER	Bundle	94.14	73.92
	Layer	10.46	9.24
	Section	-	-
	Stone	1.31	2.6

PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	0.85	-
	Section	-	-
	Layer	8.86	-
	Bundle	79.72	-

UNITS PER	SqFt	0.76	0.39
	Section	-	-
	Bundle	72.00	192.00

LBS PER	Layer	287	306.24
	Section	-	-
	Bundle	2,584	2,450

Colors	Reflectance	Stock	Stock
Notte Random/Hex	SR n/a SRI n/a	✓	✓
Sabia Random/Hex	SR n/a SRI n/a	✓	✓
Scuro Random/Hex	SR n/a SRI n/a	✓	✓



Notes: Random bundle is not suitable for vehicular use. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty


APPEARANCE

Edge Detail Micro Surface Texture - Smooth/Exposed
Joint Spacing Smooth - 3 mm


TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



Hex Paver A

SINGLE UNIT



8 x 8
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 Units/Bundle
.39 SqFt/Stone

	8 x 8
Bundle Type	SINGLE
Plant Produced	RITTMAN
Thickness (mm)	70 mm

SQFT PER	Bundle	73.92
	Layer	9.24
	Section	-
	Stone	0.39

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.60
	Section	-
	Bundle	192.00

LBS PER	Layer	306
	Section	-
	Bundle	2,450

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓



**APPLICATIONS**

Pedestrian, Light Vehicular, Borders and accents

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 8	4 x 8
Bundle Type	SINGLE	SINGLE
Plant Produced	OHIO	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	106.20	118.00
	Layer	11.80	11.80
	Section	-	-
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	10.00
	Sections	6.00	-

SOLDIER LNFT PER	SqFt	1.50	1.50
	Section	-	-
	Layer	17.72	17.71
	Bundle	159.45	177.17


SAILOR LNFT PER	SqFt	3.00	3.00
	Section	-	-
	Layer	35.43	35.43
	Bundle	318.90	354.33

UNITS PER	SqFt	4.58	4.58
	Section	-	-
	Bundle	486.00	540.00


LBS PER	Layer	307	307
	Section	-	-
	Bundle	2,759	3,070

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓
Granite Fusion	SR n/a SRI n/a	✓	✓
Mocha	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION




LAYING PATTERNS



HollandPremier 4x8 RB



HollandPremier 4x8 HB



HollandPremier 4x8 BW

SINGLE UNIT

RITTMAN



4 x 8

100 x 200 x 60mm
3 7/8" x 7 7/8" x 2 3/8"
486 Units/Bundle
.22 Sq.Ft./Stone

SINGLE UNIT

HARRISON



4 x 8

100 x 200 x 60mm
3 7/8" x 7 7/8" x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone



Notes: Special Order (SO). Minimum quantities apply. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty

APPEARANCE

Edge Detail - Chamfer
Surface Texture - Smooth
Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

Bundle Type	4 x 8	4 x 8
Plant Produced	OHIO	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	106.20	118.00
	Layer	11.80	11.80
	Section	-	-
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.50	1.50
	Section	-	-
	Layer	17.72	17.71
	Bundle	159.45	177.17


SAILOR LNFT PER	SqFt	3.00	3.00
	Section	-	-
	Layer	35.43	35.43
	Bundle	318.90	354.33

UNITS PER	SqFt	4.58	4.58
	Section	-	-
	Bundle	486.00	540.00


LBS PER	Layer	319	319
	Section	-	-
	Bundle	2,868	3,190

Colors	Reflectance	Stock	Stock
Charcoal	SR .12 SRI 9	✓	✓
River	SR .32 SRI 34	✓	✓
Rustic Red	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION




LAYING PATTERNS



Hollandstone 4x8 HB



Hollandstone 4x8 RB



Hollandstone 4x8 BW

SINGLE UNIT

RITTMAN



4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
486 Units/Bundle
.22 Sq.Ft./Stone

SINGLE UNIT

HARRISON



4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Border/Accents

APPEARANCE

Edge Detail - Micro
Surface Texture - Il Campo® Brushed
Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 x 8
Bundle Type	SINGLE
Plant Produced	RITTMAN
Thickness (mm)	60 mm

SQFT PER	Bundle	106.2
	Layer	11.80
	Section	-
	Stone	0.22

PER BUNDLE	Layers	9.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


UNITS PER	SqFt	4.58
	Section	-
	Bundle	486

LBS PER	Layer	-
	Section	-
	Bundle	2,759


Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Mocha	SR n/a SRI n/a	✓




LAYING PATTERNS



Il Campo 8x16 HB



Il Campo 4x8 RB



Il Campo 4x8 SB

SINGLE UNIT



4 x 8
100 x 200 x 60mm
3 3/8 x 7 7/8 x 2 3/8"
486 Units/Bundle
.22 SqFt/Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Zero

Surface Texture - Smooth

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	STANDARD
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	60 mm

SQFT PER	Bundle	111.60
	Layer	11.16
	Section	-
	Stone	0.16

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	141.73


SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	566.93

UNITS PER	SqFt	6.45
	Section	-
	Bundle	720.00


LBS PER	Layer	306
	Section	-
	Bundle	3062.89

Colors	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable Blend	SR n/a SRI n/a	✓


LAYER CONFIGURATION




LAYING PATTERNS



Mattoni DHB



Mattoni HB



Mattoni RB

SINGLE UNIT



STANDARD

60 x 240 x 60mm

2 3/8 x 9 1/2 x 2 3/8"

720 Units/Bundle

.16 SqFt/Stone



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Sawn

Surface Texture - Brushed / Riven

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.

SANDSTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓
Greyfield	SR .32 SRI 35	✓	✓	✓	✓
Stone Cliff Grey	SR .27 SRI 28	✓	✓	✓	✓

LIMESTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm


SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17


LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR .08 SRI 4	✓	✓	✓	✓
Hearthstone	SR .20 SRI 20	✓	✓	✓	✓

LAYING PATTERNS



NaturalStone
Multi-Unit




NaturalStone
Multi-Unit

SINGLE UNITS




12 x 24
290 x 590 x 22mm
11 1/2 x 23 1/4 x 7/8"



18 x 24
440 x 590 x 22mm
17 3/8 x 23 1/4 x 7/8"



24 x 36
590 x 890 x 22mm
23 1/4 x 35 x 7/8"



24 x 24
590 x 590 x 22mm
23 1/4 x 23 1/4 x 7/8"

Notes: **SOLD IN FULL CRATES ONLY.** This product is not intended for vehicular applications.. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Sawn

Surface Texture - Natural Finish

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit [Unilock.com](https://www.unilock.com) for more information.

SANDSTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm

SQFT PER	Crate	120.00
	Units	-

UNITS PER	Crate	32.00
	SqFt	-

LBS PER	Unit	73
	Bundle	2,515

Colors	Reflectance	Stock
Stone Cliff Grey	SR .27 SRI 28	✓

LIMESTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm


SQFT PER	Crate	120.00
	Units	3.63

UNITS PER	Crate	32
	SqFt	0.28

LBS PER	Unit	73
	Bundle	2,315


Colors	Reflectance	Stock
Hearthstone	SR n/a SRI n/a	✓

LAYING PATTERNS



NaturalStone
Fixed RB

4 UNIT RANDOM



24 x 24
590 x 590 x 38mm
23 1/4 x 23 1/4 x 1 1/2"

18 x 24
440 x 590 x 38mm
17 3/8 x 23 1/4 x 1 1/2"

24 x 36
590 x 890 x 38mm
23 1/4 x 35 x 1 1/2"

12 x 24
290 x 590 x 38mm
11 1/2 x 23 1/4 x 1 1/2"

Notes: SOLD IN FULL CRATES ONLY. This project pack must be installed with a 10 mm joint space between stones. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads

SANDSTONE	48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	16.00
	SqFt	0.80	0.80	0.80	0.90	0.90	0.90

LBS PER	Unit	101	97	106	117	117	113
	Crate	2,028	1,927	2,116	2,247	2,247	2,258



Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

LIMESTONE	48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	20.00
	SqFt	0.80	0.80	0.80	0.12	0.12	0.12

LBS PER	Unit	112	112	112	130	130	130
	Crate	2,222	2,222	2,222	2,593	2,593	2,593

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

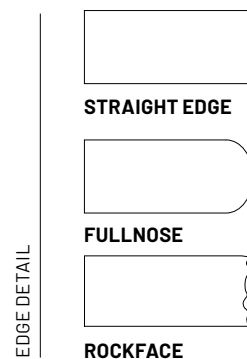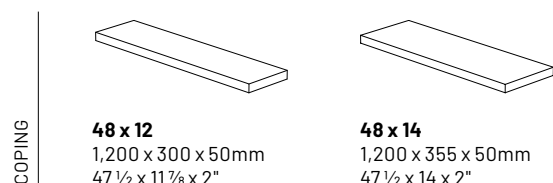

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads

SANDSTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	5.4	5.4	4.0	4.0	9.0

LBS PER	Unit	113	113	91	91	106
	Crate	2,249	2,249	1,808	1,808	2,120

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	-	-	-
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	-	-	-

LIMESTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm


UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	8.2	8.2	6.0	6.0	9.0

LBS PER	Unit	117	117	84	84	90
	Crate	2,237	2,237	1,676	1,676	1,800

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	-	-	-

INSERT COPING


Insert coping is ideal for those retractable pool covers. Allowing easy access while keeping a continuous look and feel.




24 x 24
600 x 600 x 50mm
24 x 24 x 2"

CORNER COPING

Corner coping provides seamless 90° corners for pool, walls and so much more.



28 x 14
710 x 355 x 50mm
28 x 14 x 2"



24 x 12
600 x 300 x 50mm
23 5/8 x 11 7/8 x 2"

EDGE DETAIL



STRAIGHT EDGE



FULLNOSE

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Steps, Pillar

TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.

SANDSTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm	150 mm

FCFT PER	Crate	56.00	70.00	32.00
----------	-------	-------	-------	-------

LNFT PER	Crate	-	-	24.00
	Unit	-	-	4.00

UNITS PER	Crate	14.00	12.00	6.00
-----------	-------	-------	-------	------

LBS PER	Unit	143	199	421
	Crate	1,991	2,385	2,526

Colors	Reflectance	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	✓	✓	✓
Greyfield	SR n/a SRI n/a	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓

LIMESTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm	150 mm

FCFT PER	Crate	-	-	32.00
----------	-------	---	---	-------


LNFT PER	Crate	-	-	24.00
	Unit	-	-	4.00

UNITS PER	Crate	14.00	12.00	6.00
-----------	-------	-------	-------	------


LBS PER	Unit	143	207	421
	Crate	1,995	2,480	2,526

Colors	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓

PILLAR CAPS




24 x 24
600 x 600 x 64mm
23 5/8 x 23 5/8 x 2 5/8"



28 x 28
710 x 710 x 64mm
28 x 28 x 2 5/8"

STEPS



48 x 16
1,200 x 400 x 150mm
47 1/4 x 15 3/4 x 5 7/8"

EDGE DETAIL



STRAIGHT EDGE



ROCKFACE

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Riven

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Visit Unilock.com for more information.

SANDSTONE	4 PC BUNDLE	24 x 24	24 x 36
Bundle Type	RANDOM	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm

SQFT PER	Crate	174.00	160.00	180.00
	Units	3.63	4.00	6.00

UNITS PER	Crate	48.00	40.00	30.00
	SqFt	0.28	0.25	0.17

LBS PER	Unit	47	46	69
	Bundle	2,265	1,851	2,082

Colors	Reflectance	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	✓	-	-
Golden Sand	SR n/a SRI n/a	✓	✓	✓
Indian Coast	SR n/a SRI n/a	✓	-	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓
Stone Cliff Grey	SR n/a SRI n/a	✓	-	-



LIMESTONE	4 PC BUNDLE	24 x 24	24 x 36
Bundle Type	RANDOM	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm

SQFT PER	Crate	174.00	160.00	180.00
	Units	3.63	4.00	6.00

UNITS PER	Crate	48.00	40.00	30.00
	SqFt	0.28	0.25	0.17

LBS PER	Unit	47	46	69
	Bundle	2,265	1,851	2,082

Colors	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	-	-
Winter Mist	SR n/a SRI n/a	✓	✓	✓

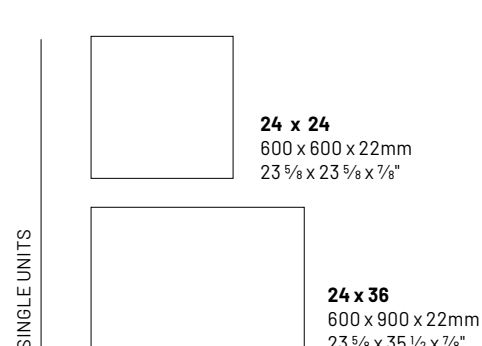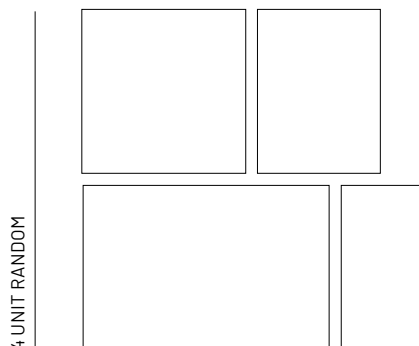

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Wall Coping, Pool Coping, Steps Treads

SANDSTONE	48 x 12 FULLNOSE COPING	48 x 12 ROCKFACE COPING	48 x 14 COPING
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 mm	50 mm	50 mm


UNITS PER	Crate	20.00	20.00	20.00
	SqFt	-	-	-

LBS PER	Unit	101	106	127.86
	Crate	2,028	2,116	2,557


Colors	Reflectance	Stock		
Autumn Harvest	SR n/a SRI n/a	-	✓	-
Golden Sand	SR n/a SRI n/a	-	✓	-
Indian Coast	SR n/a SRI n/a	-	-	-
Ivory Sand	SR n/a SRI n/a	✓	✓	-



COPING



48 x 12
1,200 x 300 x 50mm
47 1/4 x 11 7/8 x 2"



48 x 14
1,200 x 350 x 50mm
47 1/4 x 14 x 2"

EDGE DETAIL



FULLNOSE



ROCKFACE

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Steps, Pillar

TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.



SANDSTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type	SINGLE	SINGLE
Thickness (mm)	64 mm	100 mm

UNITS PER	Crate	14.00	12.00
	SqFt	-	-

LBS PER	Unit	137	200
	Bundle	1,914	2,401

Colors	Reflectance	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	✓	-
Golden Sand	SR n/a SRI n/a	✓	-
Indian Coast	SR n/a SRI n/a	✓	-
Ivory Sand	SR n/a SRI n/a	✓	-
Stone Cliff Grey	SR n/a SRI n/a	✓	✓

LIMESTONE SANDSTONE	48 x 16 STEP
Bundle Type	SINGLE
Thickness (mm)	150 mm

FCFT PER	Crate	32.00
----------	-------	-------


LNFT PER	Crate	24.00
----------	-------	-------

UNITS PER	Crate	6.00
-----------	-------	------

LBS PER	Bundle	2,526
---------	--------	-------

Colors	Reflectance	Stock
Autumn Harvest	SR n/a SRI n/a	✓
Golden Sand	SR n/a SRI n/a	✓
Indian Coast	SR n/a SRI n/a	✓
Ivory Sand	SR n/a SRI n/a	✓
Stone Cliff Grey	SR n/a SRI n/a	✓

Colors	Reflectance	Stock
Black River	SR n/a SRI n/a	✓

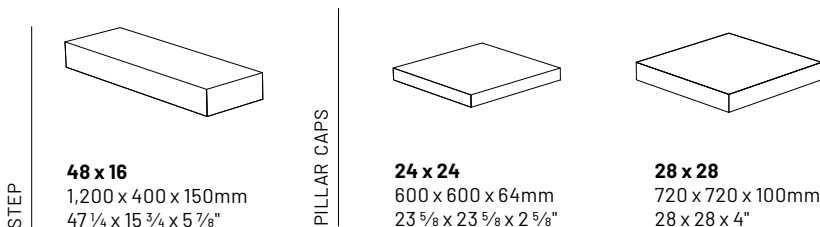

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty, Permeable

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		STANDARD
Bundle Type		SINGLE
Plant Produced		CHICAGO
Thickness (mm)		60 mm

SQFT PER	Bundle	98.25
	Layer	9.82
	Section	-
	Stone	0.09

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	3.39
	Section	-
	Layer	33.30
	Bundle	333.07


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	10.99
	Section	-
	Bundle	1,080


LBS PER	Layer	230.10
	Section	-
	Bundle	2,301

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal Blend	SR n/a SRI n/a	✓


LAYER CONFIGURATION




LAYING PATTERNS



NordicCobble_Fan



NordicCobble_Circle



NordicCobble_A

SINGLE UNITS



STANDARD

89.9 x 94 x 60mm
3 5/8 x 3 3/4 x 2 3/8"
1,080 Units/Bundle
.09 Sq.Ft./Stone





APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE

Edge Detail - Chamfer

Surface Texture - Smooth

Joint Spacing - 8 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	80 mm

SQFT PER	Bundle	77.33
	Layer	9.67
	Section	-
	Stone	0.54

PER BUNDLE	Layers	8.00
	Sections	-




SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.86
	Section	-
	Bundle	144.00

LBS PER	Layer	350
	Section	-
	Bundle	2,801

Colors	Reflectance	Stock
All Colors & Finishes	SR n/a SRI n/a	S0

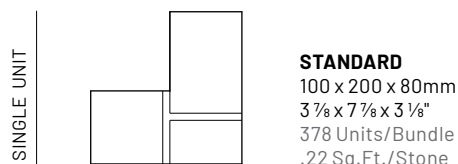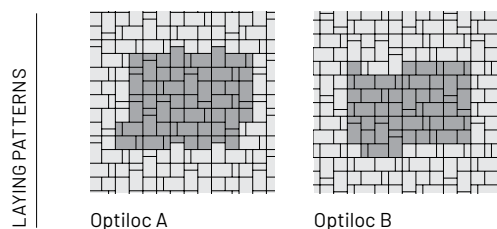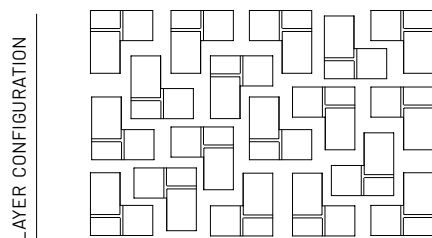

Porcelain 24x24 - 16x48



APPLICATIONS

Pedestrian

APPEARANCE

Surface Texture - Woodgrain & Stone Finish

TECHNICAL INFORMATION

Visit Unilock.com for more information.

	24 x 24 PRESSED EDGE	PRESSED EDGE	16 x 48 PRESSED EDGE
Bundle Type	SINGLE	RANDOM	SINGLE
Thickness (mm)	20 mm	20 mm	20 mm




SQFT PER	Pallet	248.00	434.00	279.18
	Box	7.75	-	5.17
	Unit	3.88	-	5.17

PER PALLET	Box	32.00	-	54.00
	SqFt	248.00	-	279.18
	Unit	64.00	-	54.00

UNITS PER	Pallet	64.00	192	54.00
	Box	2.00	-	1.00

LBS PER	Unit	36	-	52
	SqFt	9	-	10
	Box	72	-	52
	Pallet	2,310	4,005	2,797

Colors	Reflectance	Stock	Stock	Stock
Chamonix Beige	n/a	✓	-	-
Chamonix Bianco	n/a	✓	-	-
Chamonix Dark Grey	n/a	✓	-	-
Chamonix Grey	n/a	✓	-	-
Gotham Bianco	n/a	✓	-	-
Gotham Grey	n/a	✓	✓	-
Gotham Nero	n/a	✓	-	-
Travestone Beige	n/a	✓	✓	-
Travestone Grey	n/a	✓	-	-
West 57th Bianco	n/a	✓	-	-
West 57th Grey	n/a	✓	-	-
Essential White	n/a	✓	-	-
Essential Grey	n/a	✓	-	-
Essential Anthracite	n/a	✓	-	-
Essential Beige	n/a	✓	-	-
Nature Dolomite	n/a	✓	-	-
Nature Carrara	n/a	✓	-	-
New England White	n/a	✓	-	-
New England Ivory	n/a	✓	-	-
New England Cold Grey	n/a	✓	-	-
Monteverde Beige	n/a	-	-	✓
Monteverde Grey	n/a	-	-	✓
Monteverde Noce	n/a	-	-	✓

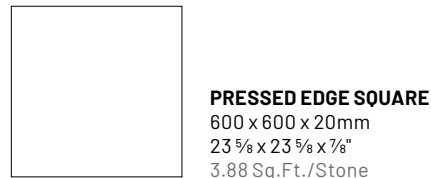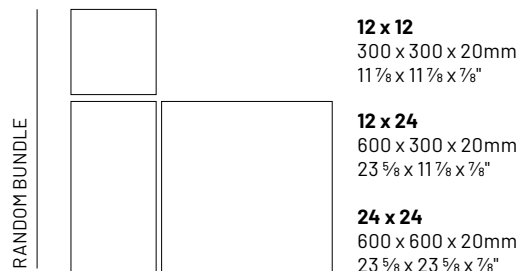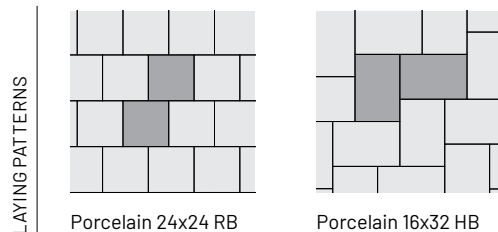

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Porcelain tile is not covered by Unilock's Lifetime Guarantee. **Product is not intended for vehicular applications.** Contact Unilock for more information.

Porcelain 16x32" - 24x48"



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Surface Texture - Woodgrain & Stone Finish

TECHNICAL INFORMATION

Visit Unilock.com for more information.

		16 x 32 PRESSED EDGE (STONE)	16 x 32 PRESSED EDGE (WOOD)	24 x 48
Bundle Type		SINGLE	SINGLE	SINGLE
Thickness (mm)		20 mm	20 mm	20 mm

SQFT PER	Pallet	165.36	268.71	103.4
	Box	6.89	6.89	5.17
	Unit	3.45	3.45	5.17

PER PALLET	Box	24.00	39.00	20.00
	SqFt	165.36	268.71	103.4
	Unit	48.00	78.00	20.00


UNITS PER	Pallet	48.00	78.00	20.00
	Box	2.00	2.00	1.00

LBS PER	Unit	32	32	49.82
	SqFt	9	9	9.63
	Box	65	64	49.82
	Pallet	1,552	2,504	996.4

Colors	Reflectance	Stock	Stock	Stock
Arbor Bianco (WG)	n/a	-	✓	-
Quartzite Bianco	n/a	✓	-	-
Quartzite Dark Grey	n/a	✓	-	-
Quartzite Grey	n/a	✓	-	-
Quartzite Sand	n/a	✓	-	-
Travestone Beige	n/a	✓	-	-
Travestone Grey	n/a	✓	-	-
New England White	n/a	✓	-	✓
New England Ivory	n/a	✓	-	✓
New England Cold Grey	n/a	✓	-	-



LAYING PATTERNS



Porcelain 16x32 HB

SINGLE UNITS



24 x 48
600 x 1200 x 20mm
23 5/8 x 47 1/4 x 7/8"
5.17 Sq.Ft./Stone



16 x 32
400 x 800 x 20mm
15 3/4 x 31 1/2 x 7/8"
3.45 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Porcelain tile is not covered by Unilock's Lifetime Guarantee. **Product is not intended for vehicular applications.** Contact Unilock for more information.



APPLICATIONS


Pedestrian, Light Vehicular, Roadway Street, Heavy-duty

APPEARANCE


Edge Detail - Rounded
Surface Texture - Smooth,
Series™ Exposed & Il Campo® Brushed
Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits



Promenade 4x12 RB



Promenade 4x16 HB

LAYING PATTERNS

SINGLE UNITS




**8 x 24
SMOOTH**
200 x 600 x 100mm
7 1/8 x 23 5/8 x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
SERIES EXPOSED**
200 x 600 x 100mm
7 1/8 x 23 5/8 x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
IL CAMPO BRUSHED**
200 x 600 x 100mm
7 1/8 x 23 5/8 x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone

**8 x 24
UMBRIANO**
200 x 600 x 100mm
7 1/8 x 23 5/8 x 3 7/8"
40 Units/Bundle
1.29 Sq.Ft./Stone



**4 x 16
SMOOTH**
100 x 400 x 100mm
3 7/8 x 15 3/4 x 3 7/8"
120 Units/Bundle
.43 Sq.Ft./Stone

	4 x 16 SMOOTH	8 x 24 SMOOTH	8 x 24 SERIES	8 x 24 IL CAMPO	8 x 24 UMBRIANO
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	PICKERING	PICKERING	GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)	100 mm	100 mm	100 mm	100 mm	70 mm

SQFT PER	Bundle	51.67	51.67	51.67	51.67	82.67
	Layer	10.33	10.33	10.33	10.33	10.33
	Section	-	-	-	-	-
	Stone	0.43	1.29	1.29	1.29	1.29

PER BUNDLE	Layers	5.00	5.00	5.00	5.00	8.00
	Sections	-	-	-	-	-

SOLDIER LNFT PER	SqFt	0.76	0.51	0.51	0.51	0.51
	Section	-	-	-	-	-
	Layer	7.87	5.25	5.25	5.25	5.25
	Bundle	39.37	26.25	26.25	26.25	41.99

SAILOR LNFT PER	SqFt	3.05	1.52	1.52	1.52	1.02
	Section	-	-	-	-	-
	Layer	31.50	15.75	15.75	15.75	10.50
	Bundle	157.48	78.74	78.74	78.74	83.99

UNITS PER	SqFt	2.32	0.77	0.77	0.77	0.77
	Section	-	-	-	-	-
	Bundle	120.00	40.00	40.00	40.00	64.00

LBS PER	Layer	488	478	478	478	331
	Section	-	-	-	-	-
	Bundle	2,440	2,391	2,391	2,391	2,647

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-	-	✓	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	-	✓	-
Granite Fussion	SR n/a SRI n/a	-	-	-	✓	-
Light Grey	SR n/a SRI n/a	-	-	-	✓	-
Opal Blend	SR .24 SRI 24	-	✓	-	-	-
Steel Grey	SR n/a SRI n/a	✓	-	-	-	-
French Grey	SR .18 SRI 17	-	-	-	-	✓
Midnight Sky	SR .17 SRI 15	-	-	-	-	✓
Summer Wheat	SR .42 SRI 48	-	-	-	-	✓
Winter Marvel	SR .35 SRI 38	-	-	-	-	✓

Notes: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Heavy-duty

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth, Series™ & Umbriano

Il Campo® Brushed®

Joint Spacing - 4 mm / 7mm (Umbriano)

TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits




		SMOOTH	SERIES	IL CAMPO	SMOOTH	UMBRIANO®
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	PICKERING	GEORGETOWN	GEORGETOWN	OHIO	MARENGO
	Thickness (mm)	100 mm	100 mm	100 mm	80 mm	80 mm
SQFT PER	Bundle	58.13	58.13	58.13	81.41	93.04
	Layer	11.63	11.63	11.63	11.63	11.63
	Section	-	-	-	-	-
	Stone	0.32	0.32	0.32	0.32	0.32
PER BUNDLE	Layers	5.00	5.00	5.00	7.00	8.00
	Sections	-	-	-	-	-
SOLDIER LNFT PER	SqFt	1.02	1.02	1.02	1.02	1.02
	Section	-	-	-	-	-
	Layer	11.81	11.81	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06	82.68	94.49
SAILOR LNFT PER	SqFt	3.05	3.05	3.05	3.05	3.05
	Section	-	-	-	-	-
	Layer	35.43	35.43	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17	248.03	283.46
UNITS PER	SqFt	3.10	3.10	3.10	3.10	3.10
	Section	-	-	-	-	-
	Bundle	180.00	180.00	180.00	252.00	288.00
LBS PER	Layer	532	532	532	425	426
	Section	-	-	-	-	-
	Bundle	2,659	2,659	2,659	2,978	3,404

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black Granite	n/a	-	✓	-	-	-
Light Grey	n/a	-	-	✓	-	-
Sandstone	n/a	✓	-	-	-	-
Opal Blend	n/a	-	-	-	✓	-
Dark Charcoal	n/a	-	-	-	✓	-
Medium Grey	n/a	-	-	-	✓	-
French Grey	SR .17 SRI 15	-	-	-	-	✓
Midnight Sky	SR .17 SRI 15	-	-	-	-	✓
Winter Marvel	SR .17 SRI 15	-	-	-	-	✓

LAYING PATTERNS



Promenade 4x16HB



Promenade 4x12 RB

SINGLE UNITS

80 mm



**4 x 12
SMOOTH**
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
252 Units/Bundle
.32 Sq.Ft./Stone

**4 x 12
UMBRIANO®**
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
.32 Sq.Ft./Stone

SINGLE UNITS

100 mm

**4 x 12
SMOOTH**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 Units/Bundle
.32 Sq.Ft./Stone

**4 x 12
SERIES**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 Units/Bundle
.32 Sq.Ft./Stone

**4 X 12
IL CAMPO BRUSHED**
100 x 300 x 100mm
3 7/8 x 11 7/8 x 3 7/8"
180 Units/Bundle
.32 Sq.Ft./Stone

Notes: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 10 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		LARGE RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	-	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56


SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00


LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

Colors	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	✓
Pebble Taupe	SR n/a SRI n/a	✓	✓
Smoke Shale	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION



LAYING PATTERNS




Richcliff Fixed
Random A



Richcliff
LargeRec. HB



3 UNIT RANDOM BUNDLE




RECTANGLE
226 x 300 x 60mm
8 7/8 x 11 7/8 x 2 3/8"
64 Units/Bundle
.75 SqFt./Stone

SQUARE
226 x 226 x 60mm
8 7/8 x 8 7/8 x 2 3/8"
32 Units/Bundle
.58 Sq.Ft./Stone

SMALL RECTANGLE
150 x 226 x 60mm
5 7/8 x 8 7/8 x 2 3/8"
64 Units/Bundle
.38 Sq.Ft./Stone

SINGLE UNIT



LARGE RECTANGLE
302 x 528 x 60mm
11 7/8 x 20 7/8 x 2 3/8"
48 Units/Bundle
1.72 Sq.Ft./Stone

**APPLICATIONS**

Pedestrian, Light Vehicular, Roadway Street,
Border/Accents

APPEARANCE

Edge Detail - Chamfer
Surface Texture - Series Exposed
Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

		4 x 8	4 x 12 PERMEABLE
Bundle Type		SINGLE	SINGLE
Plant Produced		CHICAGO	CHICAGO
Thickness (mm)		60 mm	80 mm

SQFT PER	Bundle	117.90	93.04
	Layer	11.79	11.63
	Section	-	-
	Stone	0.22	0.32

PER BUNDLE	Layers	10.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	1.50	1.02
	Section	-	-
	Layer	17.72	11.81
	Bundle	177.17	94.49


SAILOR LNFT PER	SqFt	3.01	3.05
	Section	-	-
	Layer	35.43	35.43
	Bundle	354.33	283.46

UNITS PER	SqFt	4.58	3.10
	Section	-	-
	Bundle	540.00	288.00


LBS PER	Layer	328	426
	Section	-	-
	Bundle	3,283	3,404

Colors	Reflectance	Stock	Stock
Onyx Black	SR n/a SRI n/a	✓	-
Arctic Grey 	SR n/a SRI n/a	-	✓
Nordic Star 	SR n/a SRI n/a	-	✓

LAYING PATTERNS



Series 4x8 HB



Series 4x8 RB

SINGLE UNITS



4 x 8
100 x 200 x 60mm
3 7/8 x 7 7/8 x 2 3/8"
540 Units/Bundle
.22 Sq.Ft./Stone



4 x 12 PERMEABLE 
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
288 Units/Bundle
.32 Sq.Ft./Stone



Notes: This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 2 mm

TECHNICAL INFORMATION


Conforms to ASTM C 1782

Eligible for LEED v4.1 credits


// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview™ pedestal system


LAYER CONFIGURATION

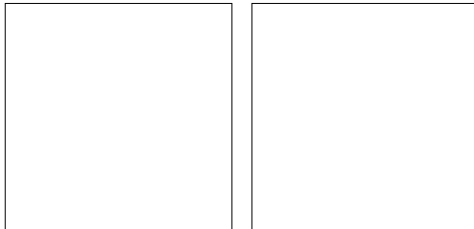

LAYING PATTERNS




Skyline 24x24 SB



Skyline 24x24 RB

SINGLE UNITS



24 x 24
606 x 606 x 50mm
23 5/8 x 23 5/8 x 2"
20 Units/Bundle
3.88 Sq.Ft./Stone

	24 x 24
Bundle Type	SINGLE
Plant Produced	HARRISON
Thickness (mm)	50 mm

SQFT PER	Bundle	80.00
	Layer	8.00
	Sections	-
	Stone	3.88

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Sections	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.25
	Layer	-
	Bundle	20.00

LBS PER	Layer	183
	Sections	-
	Bundle	1,756

Colors	Reflectance	Stock
Chamois	SR .41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓





APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Micro

Surface Texture - Thermal/Flamed and Shot Blast

TECHNICAL INFORMATION

Conforms to ASTM C 1782

Eligible for LEED v4.1

// Perfect for roof decks and other raised floor applications.

Ask us about our Skyview™ pedestal system

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 mm	50 mm

SQFT PER	Bundle	64.27	64.27
	Layer	3.57	3.57
	Section	-	-
	Stone	3.57	3.57

PER BUNDLE	Layers	18.00	18.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.37	0.38
	Section	-	-
	Layer	1.34	1.34
	Bundle	24.04	24.12


SAILOR LNFT PER	SqFt	0.75	0.75
	Section	-	-
	Layer	2.67	2.67
	Bundle	48.13	48.06

UNITS PER	SqFt	0.28	0.28
	Section	-	-
	Bundle	18.00	18.00


LBS PER	Layer	86	86
	Section	-	-
	Bundle	1,549	1,549

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	✓
Light Granite	SR n/a SRI 50	✓	-
Toscana Beige	SR n/a SRI 77	✓	-

LAYING PATTERNS



Soreno 16x32 RB



Soreno 16x32 HB

SINGLE UNITS



16 x 32
407 x 815 x 50mm
16 x 32 x 2"
18 Units/Bundle
3.57 Sq.Ft./Stone



Notes: This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	RITTMAN
Thickness (mm)	70 mm

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00

LBS PER	Layer	330
	Section	-
	Bundle	2,638


Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓




LAYER CONFIGURATION




LAYING PATTERNS



Thornbury Fixed
Random A




Thornbury Fixed
Random B



Thornbury Fixed
Random C

3 UNIT RANDOM BUNDLE



LARGE RECTANGLE

350 x 420 x 70mm
13 7/8 x 16 5/8 x 2 3/4"
32 Units/Bundle
1.58 SqFt./Stone

SQUARE

210 x 350 x 70mm
8 3/8 x 13 7/8 x 2 3/4"
32 Units/Bundle
.79 Sq.Ft./Stone

SMALL RECTANGLE

173 x 210 x 70mm
6 7/8 x 8 3/8 x 2 3/4"
32 Units/Bundle
.39 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,
Border/Accents, Permeable

APPEARANCE

Edge Detail - Rounded
Surface Texture - Textured
Joint Spacing - 9 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	4 x 10
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 mm

SQFT PER	Bundle	88.41
	Layer	11.05
	Section	-
	Stone	.28

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47


UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888


Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓



LAYING PATTERNS



TownHall 4x10 DHB



TownHall 4x10 HB

SINGLE UNIT



4 x 10
100 x 250 x 70mm
3 7/8 x 9 7/8 x 2 3/4"
320 Units/Bundle
.28 Sq.Ft./Stone



APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 4 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM	RANDOM
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	98.09	108.98
	Layer	10.90	10.89
	Section	-	-
	Stone	0.45	0.45

PER BUNDLE	Layers	9.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	1.79	1.79
	Section	-	-
	Layer	19.56	19.56
	Bundle	176.06	195.62

UNITS PER	SqFt	2.20	2.20
	Section	-	-
	Bundle	216.00	240


LBS PER	Layer	285	285
	Section	-	-
	Bundle	2,565	2,850

Colors	Reflectance	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓


LAYER CONFIGURATION



LAYING PATTERNS




Treo Fixed Random C



Treo Fixed Random S

RANDOM BUNDLE



LARGE RECTANGLE
225 x 337.5 x 60mm
8 7/8 x 13 3/8 x 2 3/8"

SQUARE
225 x 225 x 60mm
8 7/8 x 8 7/8 x 2 3/8"

SMALL RECTANGLE
112.5 x 225 x 60mm
4 1/2 x 8 7/8 x 2 3/8"





APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 7 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	PERMEABLE
Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	60 mm

SQFT PER	Bundle	108.99
	Layer	10.90
	Section	-
	Stone	0.52

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	1.35
	Section	-
	Layer	14.76
	Bundle	147.64

UNITS PER	SqFt	1.93
	Section	-
	Bundle	210.00


LBS PER	Layer	296
	Section	-
	Bundle	2,960

Colors	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓


LAYER CONFIGURATION



LAYING PATTERNS




Treo Fixed Rando C



Treo Fixed Random S

RANDOM BUNDLE



LARGE RECTANGLE

225 x 337.5 x 60mm
8 7/8 x 13 3/8 x 2 3/8"
50 Units/Bundle
.82 Sq.Ft./Stone

SQUARE

225 x 225 x 60mm
8 7/8 x 8 7/8 x 2 3/8"
50 Units/Bundle
.55 Sq.Ft./Stone

SMALL RECTANGLE

112.5 x 225 x 60mm
4 1/2 x 8 7/8 x 2 3/8"
150 Units/Bundle
.27 Sq.Ft./Stone



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Permeable

APPEARANCE

Edge Detail - Micro

Surface Texture - Series Exposed Textured


Joint Spacing - 10mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



TribecaCobble Fixed
Random

RANDOM BUNDLE



LARGE RECTANGLE

130 x 305 x 70mm
5 x 12 x 2 3/4"
88 Units/Bundle
.43 Sq.Ft./Stone

RECTANGLE

130 x 230 x 70mm
5 x 9 x 2 3/4"
88 Units/Bundle
.32 Sq.Ft./Stone

SMALL RECTANGLE

130 x 175 x 70mm
5 x 6 7/8 x 2 3/4"
128 Units/Bundle
.25 Sq.Ft./Stone

Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 mm

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	3.12
	Section	-
	Bundle	304.00

LBS PER	Layer	398
	Section	-
	Bundle	3,186

Colors	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓





APPLICATIONS

Pedestrian, Light Vehicular, Permeable,
Roadway Street

APPEARANCE

Edge Detail - Zero
Surface Texture - Smooth
Joint Spacing - 2mm

TECHNICAL INFORMATION

Conforms to ASTM C1319
Eligible for LEED v4.1 credits

	SMOOTH	SMOOTH
Bundle Type	SINGLE	SINGLE
Plant Produced	RITTMAN	HARRISON
Thickness (mm)	80 mm	80 mm

SQFT PER	Bundle	70.00	80.00
	Layer	10.00	10.00
	Section	-	-
	Stone	2.50	2.50

PER BUNDLE	Layers	7.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

UNITS PER	SqFt	0.40	0.40
	Section	-	-
	Bundle	28.00	32.00


LBS PER	Layer	249	247
	Section	-	-
	Bundle	1,746	1,975

Colors	Reflectance	Stock	Stock
Natural	SR .30 SRI 32	✓	✓

LAYER CONFIGURATION




LAYING PATTERNS



Turfstone A

SINGLE UNIT


RITTMAN



STANDARD
400 x 600 x 80mm
15 3/4 x 23 5/8 x 3 1/8"
28 Units/Bundle
2.50 Sq.Ft./Stone

SINGLE UNIT

HARRISON



STANDARD
400 x 600 x 80mm
15 3/4 x 23 5/8 x 3 1/8"
32 Units/Bundle
2.50 Sq.Ft./Stone





APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Micro

Surface Texture - Umbriano Mottled

Joint Spacing - 4mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	12 x 24	24 x 24
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	50 mm	50 mm

SQFT PER	Bundle	58.13	38.75
	Layer	11.63	7.75
	Sections	-	-
	Stone	1.94	3.88

PER BUNDLE	Layers	5.00	5.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.52
	Sections	-	-
	Layer	-	4.00
	Bundle	-	20.00


SAILOR LNFT PER	SqFt	-	0.52
	Sections	-	-
	Layer	-	4.00
	Bundle	-	20.00

UNITS PER	SqFt	0.52	0.26
	Sections	-	-
	Bundle	30.00	10.00


LBS PER	Layer	261	175
	Sections	-	-
	Bundle	1,303	874

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓
Grenada White	SR .45 SRI 52	✓	✓
Midnight Sky	SR .17 SRI 15	✓	✓
Summer Wheat	SR .42 SRI 48	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓

LAYER CONFIGURATION

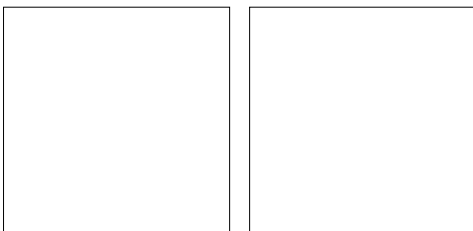

LAYING PATTERNS

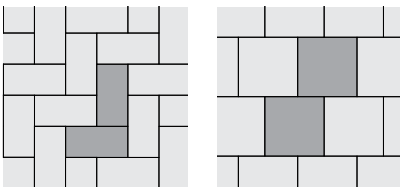

Umbriano 12x24 HB

Umbriano 24x24 RB

SINGLE UNITS



12 x 24
300 x 600 x 50mm
11 7/8 x 23 5/8 x 2"
30 Units/Bundle
1.94 Sq.Ft./Stone



24 x 24
600 x 600 x 50mm
23 5/8 x 23 5/8 x 2"
10 Units/Bundle
3.88 Sq.Ft./Stone



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled


Joint Spacing - 7mm

TECHNICAL INFORMATION



Conforms to ASTM C 936

Eligible for LEED v4.1 credits


		SMALL RECTANGLE		9 x 9
Bundle Type		RANDOM	SINGLE	SINGLE
Plant Produced		GEORGETOWN	GEORGETOWN	GEORGETOWN
Thickness (mm)		60 mm	60 mm	60 mm
SQFT PER	Bundle	94.14	94.20	98.08
	Layer	10.46	10.46	10.89
	Section	-	-	-
	Stone	1.31	1.43	0.54
PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-
SOLDIER LNFT PER	SqFt	-	0.85	-
	Section	-	-	-
	Layer	-	8.85	-
	Bundle	-	79.72	-
SAILOR LNFT PER	SqFt	0.85	1.69	-
	Section	-	-	-
	Layer	8.86	17.71	-
	Bundle	79.72	159.4	-
UNITS PER	SqFt	0.76	1.43	1.28
	Section	-	-	-
	Bundle	72.00	135.00	180.00
LBS PER	Layer	287	-	289
	Section	-	-	-
	Bundle	2,584	-	2,607



Colors	Reflectance	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	-
Grenada White	SR .n/a SRI 52	✓	✓	-
Midnight Sky	SR .17 SRI 15	-	✓	✓
Summer Wheat	SR .42 SRI 48	✓	✓	-
Winter Marvel	SR .35 SRI 2	✓	✓	-

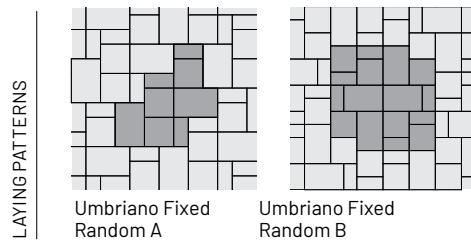

9 x 9
228 x 228 x 60mm
9 x 9 x 2 3/8"
27 Units/Bundle
.655 Sq.Ft./Stone

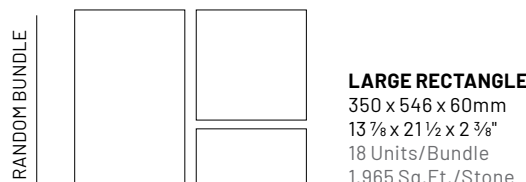

SQUARE
360 x 360 x 60mm
14 1/4 x 14 1/4 x 2 3/8"
27 Units/Bundle
1.431 Sq.Ft./Stone

SMALL RECTANGLE
180 x 360 x 60mm
7 x 14 1/4 x 2 3/8"
27 Units/Bundle
.655 Sq.Ft./Stone

Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 4mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	21 x 36	18 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	104.60	52.31
	Layer	10.46	8.72
	Sections	-	-
	Stone	1.31	4.36

PER BUNDLE	Layers	10.00	6.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.68
	Sections	-	-
	Layer	-	5.91
	Bundle	-	35.44


SAILOR LNFT PER	SqFt	0.82	1.35
	Sections	-	-
	Layer	8.61	11.81
	Bundle	86.12	70.87

UNITS PER	SqFt	0.76	0.23
	Sections	-	-
	Bundle	80.00	12.00


LBS PER	Layer	305	239
	Sections	-	-
	Bundle	3,050	1,436

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓
Grenada White	SR .45 SRI 52	✓	✓
Midnight Sky	SR .17 SRI 15	✓	✓
Summer Wheat	SR .42 SRI 48	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓

LAYING PATTERNS



Umbriano 21 x 36 RB



Umbriano 18 x 36 RB

SINGLE UNITS



21 x 35
540 x 890 x 60mm
21 x 35 x 2 3/8"
80 Units/Bundle
1.31 Sq.Ft./Stone



18 x 36
450 x 900 x 60mm
17 3/4 x 35 1/2 x 2 3/8"
12 Units/Bundle
4.36 Sq.Ft./Stone





APPLICATIONS

Pedestrian

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	24 x 24	12 x 24	8 x 24	8 x 16	16 x 16
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GEORGETOWN				
Thickness (mm)	70 mm	70 mm	70 mm	70 mm	70 mm

SQFT PER	Bundle	62.00	93.00	82.67	82.67	82.67
	Layer	7.75	11.63	10.33	10.33	10.33
	Section	-	-	-	-	-
	Stone	3.88	1.94	1.29	0.86	1.72

PER BUNDLE	Layers	8.00	8.00	8.00	8.00	8.00
	Sections	-	-	-	-	-


SOLDIER LNFT PER	SqFt	0.51	0.51	0.51	0.76	0.76
	Section	-	-	-	-	-
	Layer	3.94	5.91	5.25	7.87	7.87
	Bundle	31.50	47.24	41.99	62.99	62.99


SAILOR LNFT PER	SqFt	0.51	1.02	1.02	1.52	0.76
	Section	-	-	-	-	-
	Layer	3.94	11.81	10.50	15.75	7.87
	Bundle	31.50	94.49	83.99	125.98	62.99

UNITS PER	SqFt	0.26	0.52	0.77	1.16	0.58
	Section	-	-	-	-	-
	Bundle	16.00	48.00	64.00	96.00	48.00

LBS PER	Layer	258	393	331	343	350
	Section	-	-	-	-	-
	Bundle	2,062	3,142	2,647	2,746	2,797

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	✓	✓	✓
Grenada White	SR .45 SRI 52	-	-	✓	✓	-
Midnight Sky	SR .17 SRI 15	✓	✓	✓	✓	✓
Summer Wheat	SR .42 SRI 48	✓	✓	✓	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓	✓	✓	✓

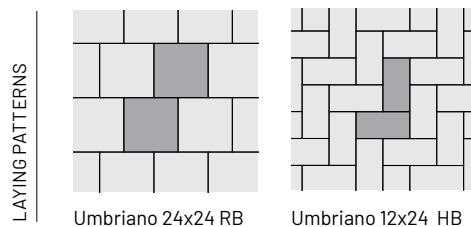

SINGLE UNITS		24 x 24 600 x 600 x 70mm 23 5/8 x 23 5/8 x 2 3/4" 16 Units/Bundle 3.88 Sq.Ft./Stone
		8 x 24 200 x 600 x 70mm 7 7/8 x 23 5/8 x 2 3/4" 64 Units/Bundle 1.29 Sq.Ft./Stone
		12 x 24 300 x 600 x 70mm 11 7/8 x 23 5/8 x 2 3/4" 48 Units/Bundle 1.94 Sq.Ft./Stone
		8 x 16 200 x 400 x 70mm 7 7/8 x 15 3/4 x 2 3/4" 96 Units/Bundle .86 Sq.Ft./Stone

Notes: 24x24" paver is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular,

APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled


Joint Spacing - 7mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION



LAYING PATTERNS

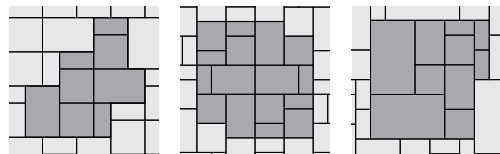

Umbriano Fixed Random A

Umbriano Fixed Random B

Umbriano Multi-Unit Random G

SINGLE UNIT




SMALL RECTANGLE
180 x 360 x 80mm
7 x 14 1/4 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone



4 x 12 PERMEABLE
100 x 300 x 80mm
3 7/8 x 11 7/8 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone



RANDOM BUNDLE



LARGE RECTANGLE
360 x 540 x 80mm
14 x 21 x 3 1/8"
14 Units/Bundle
2.09 Sq.Ft./Stone

SQUARE
360 x 360 x 80mm
14 x 14 x 3 1/8"
21 Units/Bundle
1.40 Sq.Ft./Stone

SMALL RECTANGLE
180 x 360 x 80mm
7 x 14 1/4 x 3 1/8"
21 Units/Bundle
0.70 Sq.Ft./Stone

		SMALL RECTANGLE	4 x 12 PERMEABLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	GEORGETOWN		
Thickness (mm)	80 mm	80 mm	80 mm

SQFT PER	Bundle	73.22	73.24	73.24
	Layer	10.46	-	-
	Section	-	-	-
	Stone	1.31	-	-

PER BUNDLE	Layers	7.00	7.00	7.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	62.01	62.01
	Section	-	0.59	0.59
	Layer	-	-	-
	Bundle	-	-	-

SAILOR LNFT PER	SqFt	0.85	1.77	1.77
	Section	-	-	-
	Layer	8.86	-	-
	Bundle	62.01	62.01	62.01

UNITS PER	SqFt	0.76	-	-
	Section	-	-	-
	Bundle	56.00	105.00	105.00

LBS PER	Layer	383	383	383
	Section	-	-	-
	Bundle	2,680	2,680	2,680

Colors	Reflectance	Stock	Stock	Stock
Summer Wheat	SR .42 SRI 48	✓	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓	✓





APPLICATIONS

Pedestrian, Light Vehicular

APPEARANCE

Edge Detail - Rounded

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	18 x 36	36 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	100 mm	100 mm

SQFT PER	Bundle	43.59	104.60
	Layer	8.72	10.46
	Sections	-	-
	Stone	4.36	1.31

PER BUNDLE	Layers	5.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.34	-
	Sections	-	-
	Layer	2.95	-
	Bundle	14.75	-


SAILOR LNFT PER	SqFt	0.68	0.82
	Sections	-	-
	Layer	5.90	8.61
	Bundle	29.50	86.12

UNITS PER	SqFt	0.23	0.76
	Sections	-	-
	Bundle	10.00	80.00


LBS PER	Layer	399	305
	Sections	-	-
	Bundle	1,994	3,050

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO

LAYING PATTERNS




Umbriano 36 x 36 RB



Umbriano 18 x 36 RB

SINGLE UNITS



36 x 36
900 x 900 x 100mm
35 1/2 x 35 1/2 x 3 7/8"
80 Units/Bundle
1.31 Sq.Ft./Stone



18 x 36
450 x 900 x 100mm
17 3/4 x 35 1/2 x 3 7/8"
10 Units/Bundle
4.36 Sq.Ft./Stone



**APPLICATIONS**

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth


Joint Spacing - 4mm

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYING PATTERNS



Urban Fixed Random

SINGLE UNITS




9 x 9
225 x 225 x 60mm
9 x 9 x 2 3/8"
180 Units/Bundle



SMALL RECTANGLE
190 x 380 x 60mm
7 1/2 x 15 x 2 3/8"
150 Units/Bundle

RANDOM BUNDLE



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
18 Units/Bundle
4.66 Sq.Ft./Stone

SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
27 Units/Bundle
4.66 Sq.Ft./Stone

SMALL RECTANGLE
190 x 380 x 60mm
7 1/2 x 15 x 2 3/8"
27 Units/Bundle
2.33 Sq.Ft./Stone

		9 x 9	8 x 16
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm	60 mm

SQFT PER	Bundle	104.91	98.08	116.57
	Layer	11.66	10.89	11.66
	Sections	-	-	-
	Stone	1.46	0.54	0.78

PER BUNDLE	Layers	9.00	9.00	10.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	-	0.78
	Sections	-	-	-
	Layer	-	-	9.35
	Bundle	-	-	93.50

SAILOR LNFT PER	SqFt	0.80	-	1.60
	Sections	-	-	-
	Layer	9.35	-	18.70
	Bundle	84.15	-	187.01

UNITS PER	SqFt	0.69	1.28	1.29
	Layer	-	20	-
	Bundle	72.00	180.00	150.00

LBS PER	Layer	320	289.32	332
	Section	-	-	-
	Bundle	2,878	2,603	3,318

Colors	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR .n/a SRI n/a	-	✓	-
Indiana Buff	SR .n/a SRI n/a	✓	-	✓
Sterling	SR .n/a SRI n/a	✓	-	✓
Linen Buff	SR .n/a SRI n/a	-	-	-
Linen Grey	SR .n/a SRI n/a	-	-	-



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Roof Deck

APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4mm

TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION



LAYING PATTERNS



Urban 18x36 RB

SINGLE UNITS



18 x 36
450 x 900 x 60mm
17 3/4 x 35 1/2 x 2 3/8"
12 Units/Bundle
4.36 Sq.Ft./Stone

18 x 36
450 x 900 x 100mm
17 3/4 x 35 1/2 x 4"
10 Units/Bundle
4.36 Sq.Ft./Stone

	18 x 36	18 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	100 mm

SQFT PER	Bundle	52.31	43.59
	Layer	8.72	8.72
	Sections	-	-
	Stone	4.36	4.36

PER BUNDLE	Layers	6.00	5.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.68	29.53
	Sections	-	-
	Layer	5.91	2.96
	Bundle	35.44	14.75

SAILOR LNFT PER	SqFt	1.35	-
	Sections	-	-
	Layer	11.81	5.91
	Bundle	70.87	59.05

UNITS PER	SqFt	0.23	0.23
	Layer	-	-
	Bundle	12.00	10.00

LBS PER	Layer	290	399
	Section	-	-
	Bundle	1,739	1,994

Colors	Reflectance	Stock	Stock
Indiana Buff	SR .n/a SRI n/a	✓	✓
Sterling	SR .n/a SRI n/a	✓	✓
Linen Buff	SR .n/a SRI n/a	✓	-
Linen Grey	SR .n/a SRI n/a	✓	-





APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

APPEARANCE

Edge Detail - Micro




Surface Texture - Textured

Joint Spacing - 3 mm

TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits

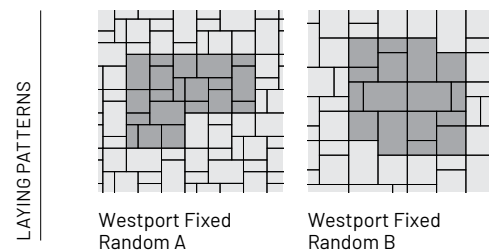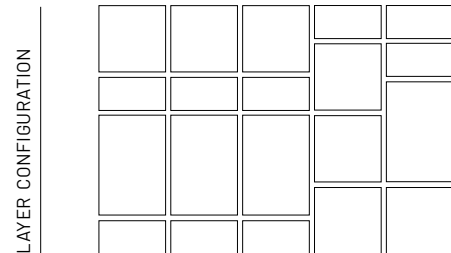

LARGE RECTANGLE
254 x 380 x 70mm
10 x 15 x 2 3/4"
32 Units/Bundle

SQUARE
254 x 254 x 70mm
10 x 10 x 2 3/4"
56 Units/Bundle

SMALL RECTANGLE
127 x 254 x 60mm
5 x 10 x 2 3/4"
72 Units/Bundle



LARGE RECTANGLE
254 x 380 x 70mm
10 x 15 x 2 3/4"
32 Units/Bundle

SQUARE
254 x 254 x 70mm
10 x 10 x 2 3/4"
56 Units/Bundle

SMALL RECTANGLE
127 x 254 x 60mm
5 x 10 x 2 3/4"
72 Units/Bundle

Bundle Type		RANDOM	RANDOM
Plant Produced		RITTMAN	HARRISON
Thickness (mm)		70 mm	70 mm

SQFT PER	Bundle	94.19	117.73
	Layer	11.77	11.77
	Section	-	-
	Stone	0.59	0.59

PER BUNDLE	Layers	8.00	10.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-

SAILOR LNFT PER	SqFt	1.24	1.24
	Section	-	-
	Layer	14.57	14.57
	Bundle	116.56	145.70

UNITS PER	SqFt	1.70	1.70
	Section	-	-
	Bundle	160.00	200.00

LBS PER	Layer	361	360
	Section	-	-
	Bundle	2,884	3,604

Colors	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

Brussels Dimensional Stone®



APPLICATIONS

Garden Wall, Seat Wall, Outdoor Kitchen, Fire Feature, Water Feature

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	SMALL TAPERED	STANDARD	SMALL TAPERED	STANDARD
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	HARRISON	HARRISON
Thickness (mm)	100 mm	100 mm	100 mm	100 mm

FCFT PER	Bundle	36.00	36.00	36.00	31.99
	Layer	6.00	6.00	6.00	5.33
	Stone	0.25	0.33	0.25	0.33

PER BUNDLE	Layers	6.00	6.00	6.00	6.00
	Sections	-	-	-	-

LNFT PER	Bundle	108.00	108.00	108.00	-
	Unit	0.75	1.00	0.75	-


UNITS PER	SqFt	4.00	3.00	4.00	-
	Section	-	-	-	-
	Bundle	144.00	108.00	144.00	96.00

LBS PER	Layer	480	530	480	471
	Section	-	-	-	-
	Bundle	2,880	3,182	2,880	2,828


Colors	Reflectance	Stock	Stock	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓	-	✓
Limestone	SR n/a SRI n/a	✓	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓



SINGLE UNIT



SMALL TAPERED
229 x 200 x 100mm
9 x 7 7/8 x 3 7/8"
.25 Fc.Ft./Stone



STANDARD
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
.33 Fc.Ft./Stone

SUNSET FIRE PIT KITS

Located on page 86



ROUND



SQUARE

Notes: Small tapered units are sold in full bundles only. Maximum height is 24" (under optimum conditions). Ledgerstone, Brussels XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TIE-BACK	STANDARD HALF	CORNER 45°	CORNER 90°
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Bundle	2.00	3.00	7.04	7.04
	Layer	2.00	3.00	7.04	7.04
	Stone	2.00	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	3.00	-	-
	Unit	-	3.00	-	-


UNITS PER	SqFt	0.50	0.33	0.14	0.14
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,660	800	1,480	1,320
	Section	-	-	-	-
	Bundle	1,660	800	1,480	1,320

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0	S0




SINGLE UNITS



TIE-BACK

1830 x 600 x 300 mm
72 x 24 x 12"
1 unit/Bundle
2.00 Fc.Ft./Stone




STANDARD HALF

915 x 600 x 300mm
36 x 24 x 12"
1 unit/Bundle
3.00 Fc.Ft./Stone



CORNER 45°

1520 x 600 x 300mm
60 x 24 x 12"
1 unit/Bundle
7.04 Fc.Ft./Stone



CORNER 90°

1520 x 600 x 300mm
72 x 24 x 12"
1 unit/Bundle
7.04 Fc.Ft./Stone

Notes: Special Order (S0). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

DuraHold® Coping



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD	COPING HALF	COPING STANDARD	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Bundle	6.02	2.95	6.02	6.02
	Layer	6.02	2.95	6.02	6.02
	Stone	6.02	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	6.02	-	-	-
	Unit	6.02	-	-	-


UNITS PER	SqFt	0.17	0.34	0.17	0.17
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00

LBS PER	Layer	1,680	780	1,560	1,560
	Section	-	-	-	-
	Bundle	1,680	780	1,560	1,560

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0	S0




SINGLE UNITS




STANDARD

1830 x 600 x 300 mm
72 x 23 $\frac{5}{8}$ x 11 $\frac{1}{8}$ "
1 unit/Bundle
6.02 Fc.Ft./Stone




COPING HALF

915 x 600 x 300mm
36 x 23 $\frac{5}{8}$ x 11 $\frac{1}{8}$ "
1 unit/Bundle
2.95 Fc.Ft./Stone



COPING

1830 x 600 x 300mm
60 x 23 $\frac{5}{8}$ x 11 $\frac{1}{8}$ "
1 unit/Bundle
6.02 Fc.Ft./Stone



CLOSED-END COPING

1830 x 600 x 300mm
72 x 23 $\frac{5}{8}$ x 11 $\frac{1}{8}$ "
1 unit/Bundle
6.02 Fc.Ft./Stone

Notes: Special Order (S0). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

DuraHold 2®



APPLICATIONS

Structural Walls

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits

	TIE-BACK	STANDARD	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Bundle	1.17	6.02	24.08	24.08
	Layer	1.17	6.02	6.02	6.02
	Stone	1.17	6.02	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	4.00	4.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	6.02	-	-
	Unit	-	6.02	-	-


UNITS PER	SqFt	0.85	0.17	0.17	0.17
	Section	-	-	-	-
	Bundle	1.00	1.00	4.00	4.00

LBS PER	Layer	938	938	884	884
	Section	-	-	-	-
	Bundle	938	938	3,536	3,536

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0	S0




SINGLE UNITS




TIE-BACK

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
1 unit/Bundle
1.17 Fc.Ft./Stone




STANDARD

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
1 unit/Bundle
6.02 Fc.Ft./Stone



COPING

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
4 Units/Bundle
6.02 Fc.Ft./Stone



CLOSED-END COPING

1830 x 360 x 300mm
72 x 14¼ x 11⅞"
4 Units/Bundle
6.02 Fc.Ft./Stone

Notes: Special Order (S0). Minimum quantities apply. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Estate Wall™



APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature,
Water Feature, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor
web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TAPERED SPLIT CLASSIC ANTIQUED	CORNER SPLIT CLASSIC ANTIQUED
Bundle Type	RANDOM	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	150 mm	150 mm

FCFT PER	Bundle	24.00	16.66
	Layer	6.00	4.17
	Stone	0.50	0.52

PER BUNDLE	Layers	4.00	4.00
	Sections	-	-

LNFT PER	Bundle	42.56	33.28
	Unit	0.89	1.04


UNITS PER	SqFt	2.00	1.92
	Section	-	-
	Bundle	48.00	32.00

LBS PER	Layer	574	444
	Section	-	-
	Bundle	2,297	1,776


Colors	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓




3" RANDOM BUNDLE



LARGE TAPERED
375 x 228 x 150mm
14 7/8 x 9 x 5 7/8"




MEDIUM TAPERED
300 x 230 x 150mm
11 7/8 x 9 x 5 7/8"



SMALL TAPERED
230 x 230 x 150mm
9 x 9 x 5 7/8"

SINGLE UNITS



PILLAR / CORNER
320 x 230 x 150mm
12 5/8 x 9 x 5 7/8"
32 Units/Bundle
.52 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. Ledgerstone™, Brussels Block® XL, or Brussels Fullnose™ complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Lineo™ Dimensional Stone



APPLICATIONS

Pillar, Outdoor Kitchen, Fire Feature, Water Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

		PILLAR / CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	100 mm	100 mm

FCFT PER	Bundle	29.92	27
	Layer	9.97	9.00
	Stone	0.50	0.33

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	89.06	-
	Unit	1.48	-

UNITS PER	SqFt	2.01	-
	Section	-	-
	Bundle	60.00	81.00

LBS PER	Layer	881	784
	Section	-	-
	Bundle	2,642	2,353

Colors	Reflectance	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓
Graphite	SR n/a SRI n/a	✓	✓
Fieldstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓




LINEO FIRE PIT




Fire pit Insert
sold separately

RANDOM BUNDLE



XL RECTANGLE
600 x 200 x 100mm
23 3/8 x 7 7/8 x 3 7/8"
15 Units/Bundle
66 Fc.Ft./Stone



LARGE RECTANGLE
500 x 200 x 100mm
19 3/4 x 7 7/8 x 3 7/8"
15 Units/Bundle
55 Fc.Ft./Stone



RECTANGLE
400 x 200 x 100mm
15 3/4 x 7 7/8 x 3 7/8"
15 Units/Bundle
44 Fc.Ft./Stone



SMALL RECTANGLE
300 x 200 x 100mm
11 7/8 x 7 7/8 x 3 7/8"
15 Units/Bundle
33 Fc.Ft./Stone

SINGLE UNIT



CORNER/PILLAR
300 x 200 x 100mm
12 x 7 7/8 x 3 7/8"
72 Units/Bundle
.67 Sq.Ft./Stone

Notes: Spacing strips are shipped with random wall bundles to create even spacing between units. LedgeStone™, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature,
Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Tumbled

CROSS SECTIONS

Cross Sections are available on Unilock's
Contractor web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER	COPING
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	WISCONSIN	CHICAGO	CHICAGO
Thickness (mm)	114 mm	114 mm	75 mm

FCFT PER	Bundle	33.75	30.89	24.00
	Layer	5.63	6.18	3.00
	Stone	-	-	-

PER BUNDLE	Layers	6.00	5.00	8.00
	Sections	-	-	-

LNFT PER	Bundle	90.00	82.40	96.00
	Unit	-	-	-


UNITS PER	SqFt	-	2.59	4.00
	Section	-	-	-
	Bundle	90.00	80.00	96.00

LBS PER	Layer	521	630	380
	Section	-	-	-
	Bundle	3,125	3,150	3,039


Colors	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓




RANDOM BUNDLE



15" LARGE TAPERED
380 x 230 x 114mm
15 x 9 x 4 1/2"
30 Units/Bundle
.47 Fc.Ft./Stone




12" MEDIUM TAPERED
305 x 230 x 114mm
11 7/8 x 9 x 4 1/2"
30 Units/Bundle
.38 Fc.Ft./Stone




9" SMALL TAPERED
230 x 230 x 114mm
9 x 9 x 4 1/2"
30 Units/Bundle
.28 Fc.Ft./Stone

SINGLE UNITS



CORNER
300 x 230 x 114mm
11 7/8 x 9 x 4 1/2"
80 Units/Bundle
.39 Fc.Ft./Stone



COPING TAPERED
305 x 305 x 75mm
12 x 12 x 3"
96 Units/Bundle
.25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** LedgeStone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Pisa™ & PisaXL



APPLICATIONS

Pillar, Steps, Structural Walls, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	STANDARD	TAPERED	CORNER	COPING	XL WALL
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO	OHIO	OHIO
Thickness (mm)	150 mm	150 mm	150 mm	75 mm	150 mm

FCFT PER	Bundle	20.00	20.00	15.00	21.00	21.33
	Layer	6.67	6.67	5.00	3.00	5.33
	Stone	0.33	0.33	0.83	0.25	0.67

PER BUNDLE	Layers	20.00	20.00	15.00	7.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	40.00	40.00	-	-	42.67
	Unit	0.67	0.67	-	-	1.33


UNITS PER	SqFt	3.00	3.00	1.20	4.00	1.50
	Section	-	-	-	-	-
	Bundle	60.00	60.00	18.00	84.00	32.00

LBS PER	Layer	857	768	314	388	617
	Section	-	-	-	-	-
	Bundle	2,570	2,305	943	2,714	2,467


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓	✓	✓
River	SR n/a SRI n/a	✓	✓	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓	✓	✓




SINGLE UNITS




STANDARD
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
60 Units/Bundle
.33 Fc.Ft./Stone



TAPERED
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
60 Units/Bundle
.33 Fc.Ft./Stone




CORNER
300 x 200 x 150mm
11 7/8 x 7 7/8 x 5 7/8"
18 Units/Bundle
.83 Fc.Ft./Stone



COPING
300 x 300 x 75mm
11 7/8 x 11 7/8 x 3"
84 Units/Bundle
.25 Fc.Ft./Stone

SINGLE UNITS



XL WALL
400 x 300 x 150mm
15 3/4 x 11 7/8 x 5 7/8"
32 Units/Bundle
.67 Fc.Ft./Stone

Notes: XL Wall units are single units and are sold in full bundles only. When purchased by the full bundle, 12" Coping bundle has 14 units of closed-end coping (7 left and 7 right). Closed-end 12" coping not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa2 wall is 3/4" every course or 1 1/2" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Tapered Units allow for a minimum 5' Radius. All measurements are nominal. Contact Unilock for more information.

Pisa™ XL Smooth



APPLICATIONS

Retaining Wall, Garden Wall, Seat Wall, Step, Pillar

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER	XL TAPERED	COPING
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	150 mm	150 mm	75 mm

FCFT PER	Bundle	46.52	20.67	15.50
	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32

PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	-	-	-

LNFT PER	Bundle	-	-	62.99
	Unit	-	-	1.31


UNITS PER	SqFt	1.03	1.55	3.10
	Section	-	-	-
	Bundle	48.00	32.00	48.00

LBS PER	Layer	629	617	388
	Section	-	-	-
	Bundle	2,516	2,467	3,101

Colors	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓	✓
Granite	SR n/a SRI n/a	✓	✓	✓




SINGLE UNITS




CORNER

400 x 200 x 150mm
15 3/4 x 7 7/8 x 5 7/8"
48 Units/Bundle
0.97 Fc.Ft./Stone



XL TAPERED

400 x 300 x 150mm
15 3/4 x 11 7/8 x 5 7/8"
32 Units/Bundle
0.65 Fc.Ft./Stone



COPING

400 x 325 x 75mm
15 3/4 x 11 7/8 x 3"
24 Units/Bundle
0.32 Fc.Ft./Stone

Notes: Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

Quarry™ Smooth



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Garden Wall, Seat Wall

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	WISCONSIN	WISCONSIN
Thickness (mm)	114 mm	114 mm

FCFT PER	Bundle	33.75	18.24
	Layer	5.63	6.08
	Stone	-	0.38

PER BUNDLE	Layers	6.00	3.00
	Sections	-	-

LNFT PER	Bundle	-	18.24
	Unit	-	-


UNITS PER	SqFt	-	2.65
	Section	-	-
	Layer	15.00	16.00
	Bundle	90.00	48.00

LBS PER	Layer	498	641
	Section	-	-
	Bundle	2,988	1,922


Colors	Reflectance	Stock	Stock
Charcoal	SR.n/a SRI n/a	✓	✓
Natural Grey	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓




RANDOM BUNDLE



15" LARGE TAPERED
380 x 230 x 114mm
15 x 9 x 4 1/2"
30 Units/Bundle
.33 Fc.Ft./Stone




12" MEDIUM TAPERED
305 x 230 x 114mm
12 x 9 x 4 1/2"
30 Units/Bundle
.33 Fc.Ft./Stone



9" SMALL TAPERED
230 x 230 x 114mm
9 x 9 x 4 1/2"
30 Units/Bundle
.55 Fc.Ft./Stone

SINGLE UNITS



CORNER
306.6 x 228.6 x 114mm
12 x 9 x 4 1/2"
48 Units/Bundle
.38Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. **Quarry tubing is added to orders when requested. Tubing may be used to set back walls.** LedgeStone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps, Fire Feature, Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER	JUMPER	CORNER JUMPER
Bundle Type	RANDOM	RANDOM	RANDOM	SINGLE
Plant Produced	AYR	AYR	AYR	AYR
Thickness (mm)	57 mm	57 mm	57 mm	57 mm

FCFT PER	Bundle	24.30	16.21	13.73	13.54
	Layer	3.0	4.0	4.0	-
	Stone	0.19	0.41	-	0.84

PER BUNDLE	Layers	8.00	4.00	4.00	2.00
	Sections	-	-	-	-

LNFT PER	Bundle	130.69	-	36.71	18.11
	Unit	1.02	-	-	1.13


UNITS PER	SqFt	5.27	2.47	-	2.13
	Section	-	-	-	-
	Bundle	128.00	40.00	-	16.00

LBS PER	Layer	252	293	-	486
	Section	-	-	-	-
	Bundle	2,015	1,173	1,631	972

Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓	✓	✓



CORNER BUNDLE




LONG CORNER UNIT
450 x 230-250 x 57mm
17½ x 9-10 x 2¼"



SHORT CORNER UNIT
375 x 230-250 x 57mm
14½ x 9-10 x 2¼"

JUMPER CORNER UNIT
COMING SOON




JUMPER CORNER
300 x 230-250 x 57mm
12 x 9-10 x 2¼"


JUMPER RANDOM BUNDLE
COMING SOON



JUMPER UNIT 1
200 x 230-250 x 57mm
8 x 9-10 x 2¼"



JUMPER UNIT 2 / 3
300 x 230-250 x 57mm
12 x 9-10 x 2¼"




JUMPER UNIT 4
425 x 230-250 x 57mm
17 x 9-10 x 2¼"


UNITS RANDOM BUNDLE




STANDARD UNIT 1
200 x 230-250 x 57mm
8 x 9-10 x 2¼"



STANDARD UNIT 2
300 x 230-250 x 57mm
12 x 9-10 x 2¼"



STANDARD UNIT 3
300 x 230-250 x 57mm
12 x 9-10 x 2¼"



STANDARD UNIT 4
425 x 230-250 x 57mm
17 x 9-10 x 2¼"

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Fire Feature,
Seat Wall, Garden Wall

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

		PILLAR UNIT
Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		114 mm
FCFT PER	Bundle	-
	Layer	-
	Stone	-
PER BUNDLE	Layers	4.00
	Sections	-
LNFT PER	Bundle	-
	Unit	-
UNITS PER	SqFt	-
	Sections	-
	Bundle	8.00
LBS PER	Layer	250
	Sections	-
	Bundle	1,000
Colors	Reflectance	Stock
Buff	SR n/a SRI n/a	✓
Coastal Slate	SR n/a SRI n/a	✓



PILLAR UNIT

COMING SOON



500 x 500 x 114mm
19 3/4 x 19 3/4 x 4 1/2"
Center opening 9 x 9"



Completed Unit Shown
Pillar cap Sold Separately

FIRE PIT KIT

COMING SOON



Fire Pit kit inserts and accessories sold separately.

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Structural Wall, Garden Wall, Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	CORNER SPLIT 90°	STANDARD 333 SPLIT	STANDARD 500 SPLIT	STANDARD 925 SPLIT	COPING SPLIT	COPING CE SPLIT 48"
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	RITTMAN	RITTMAN	RITTMAN	RITTMAN	RITTMAN	GORMLEY
Thickness (mm)	185 mm	185 MM	185 mm	185 mm	185 mm	185 mm

FCFT PER	Bundle	17.19	18.00	12.00	6.00	12.00	14.43
	Layer	5.73	6.00	4.00	2.00	4.00	4.81
	Stone	2.87	2.00	2.00	2.00	2.00	2.41

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	-	-	-	-

LNFT PER	Bundle	-	-	19.50	9.75	-	-
	Unit	-	-	3.25	3.25	-	-


UNITS PER	SqFt	0.35	0.50	0.50	0.50	0.50	0.42
	Section	-	-	-	-	-	-
	Bundle	6.00	9.00	6.00	3.00	6.00	6.00

LBS PER	Layer	834	864	878	942	954	1,140
	Section	-	-	-	-	-	-
	Bundle	2,502	2,592	2,635	2,827	2,863	3,420


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	\$0	\$0	\$0	\$0	\$0	✓
Natural	SR n/a SRI n/a	\$0	\$0	✓	\$0	✓	✓




SINGLE UNITS




CORNER SPLIT 90°
1100 x 500 x 185mm
43 1/8 x 20 x 7 1/4"
6 Units/Bundle
2.87 Fc.Ft./Stone




STANDARD 333 SPLIT
1000 x 333 x 185mm
39 3/8 x 13 x 7 1/4"
6 Units/Bundle
2.00 Fc.Ft./Stone




STANDARD 500 SPLIT
1200 x 500 x 185mm
47 1/4 x 20 x 7 1/4"
6 Units/Bundle
2.00 Fc.Ft./Stone



STANDARD 925 SPLIT
1000 x 925 x 185mm
39 3/8 x 37 1/2 x 7 1/4"
3 Units/Bundle
2.00 Fc.Ft./Stone



COPING SPLIT
1200 x 500 x 185mm
47 1/4 x 20 x 7 1/4"
6 Units/Bundle
2.00 Fc.Ft./Stone



COPING CE SPLIT 48"
1200 x 185 x 500mm
47 1/4 x 7 3/8 x 19 3/4"
6 units/Bundle
2.41 Fc.Ft./Stone

Notes: Special Order (\$0). Minimum quantities apply. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Seat Wall, Garden Wall, Structural Wall, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD CORNER	COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON
Thickness (mm)	180 mm	180 mm

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	-	-

LNFT PER	Bundle	39.37	-
	Unit	3.28	-


UNITS PER	SqFt	0.52	0.52
	Section	-	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	-	-
	Bundle	3,086	3,086

Colors	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓
Granite	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓




SINGLE UNITS



STANDARD/CORNER

1000 x 290 x 180mm
39 3/8 x 11 1/2 x 7"
12 Units/Bundle
1.94 Fc.Ft./Stone



COPING

1000 x 290 x 180mm
39 3/8 x 11 1/2 x 7"
12 Units/Bundle
1.94 Fc.Ft./Stone



APPLICATIONS

Garden Wall

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	TAPERED COPING SPLIT
Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	100 mm

FCFT PER	Bundle	32.30
	Layer	6.46
	Stone	0.22

PER BUNDLE	Layers	5.00
	Sections	-

LNFT PER	Bundle	87.50
	Unit	0.58

UNITS PER	SqFt	4.64
	Section	-
	Bundle	150.00

LBS PER	Layer	522
	Section	-
	Bundle	2,611

Colors	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

SINGLE UNIT



TAPERED COPING SPLIT
200 x 100 x 200mm
7 7/8" x 3 7/8" x 7 7/8"
150 Units/Bundle
.22 Fc.Ft./Stone

Notes: Maximum height - 20" (under optimum conditions) including material below grade. Radius - minimum outside radius 29". All measurements are nominal.



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature,
Fire Feature, Seat Wall, Garden Wall,
Retaining Walls under-3, Structural Wall

APPEARANCE

Surface Texture - Smooth, Standard, Series
Exposed, Umbriano® Mottled & Pitched

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits




1/2 Running Bond



1/2 Running Bond with Linear Accents



1/2 Running Bond with Random Accents




1/2 Running Bond with Paver Accents



Mixed Bond



1/3 Running Bond



Stacked Bond



Stacked Bond with Accents

FASCIA PANELS
FINISHES



SMOOTH



PITCHED




UMBRIANO



SERIES



SUBWAY



LAVANO

U-Cara® Multi-Face Wall System

ENDURACOLOR™



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Retaining Walls under-3, Fire Feature, Seat Wall, Garden Wall, Structural Wall

APPEARANCE

Surface Texture - Smooth, Standard, Series™ Exposed, Umbriano® Mottled, Pitched

CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor website under Products:


contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1


U-CARA RETAINING WALL GEOGRID SECTION

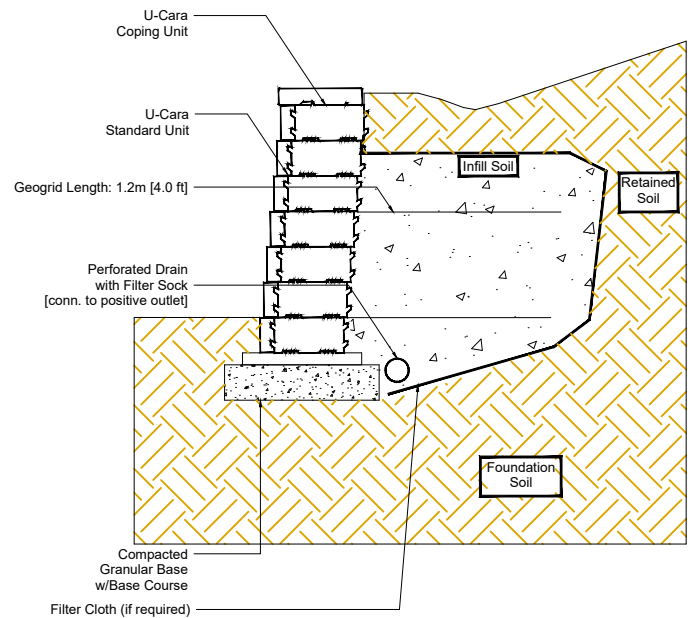

U-CARA® CROSS SECTION

REF: Detail_U-Cara_Garden_Wall

Garden Wall - Max Height 15"

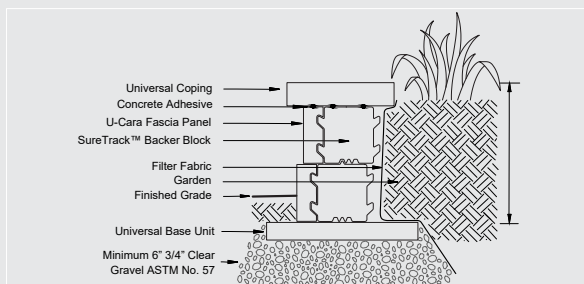


Notes:

This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA® CROSS SECTION

REF: Detail_U-Cara_Seat_Wall

Seat Wall - Max Height 21"

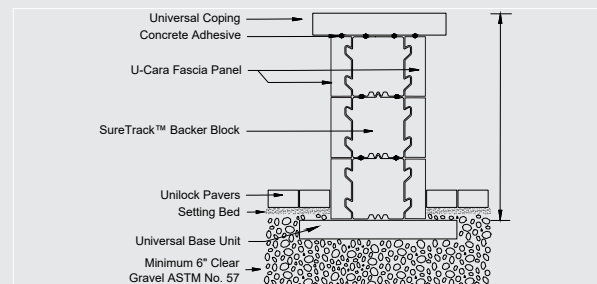

Notes:

This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

	STANDARD 6" FASCIA SMOOTH	CLOSED-END 6" FASCIA SMOOTH	STANDARD 6" FASCIA UMBRIANO	STANDARD 6" CLOSED-END UMBRIANO	STANDARD 6" FASCIA PITCHED	CLOSED-END 6" PITCHED	STANDARD 3" FASCIA SERIES EXPOSED
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	ONTARIO	ONTARIO	MICHIGAN	MICHIGAN	CHICAGO
Thickness (mm)	150 mm	150 mm	150 mm	150 mm	150 mm	150 mm	71 mm

FCFT PER	Bundle	61.52	54.18	61.52	54.18	61.52	54.18	59.32
	Layer	10.25	9.03	10.25	9.03	10.25	9.03	9.89
	Section	-	-	-	-	-	-	-
	Stone	0.73	1.29	0.73	1.29	0.73	1.29	0.18





PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00
	Sections	-	-	-	-	-	-	-

LNFT PER	Bundle	129.50	104.86	-	104.86	129.50	104.86	-
	Unit	1.54	2.50	-	2.50	1.54	2.50	-

UNITS PER	SqFt	1.37	0.78	1.37	0.78	1.37	0.78	5.66
	Section	-	-	-	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00	84.00	42.00	336.00

LBS PER	Layer	252	207	252	213	302	236	250
	Section	-	-	-	-	-	-	-
	Bundle	1,513	1,240	1,513	1,240	1,809	1,416	1,501

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Granite Fusion	SR n/a SRI n/a	✓	✓	-	-	✓	✓	-
Dark Charcoal	SR n/a SRI n/a	✓	✓	-	-	-	-	-
Fossil	SR n/a SRI n/a	✓	✓	-	-	✓	✓	-
Indiana Buff	SR n/a SRI n/a	✓	✓	-	-	-	-	-
Opal Blend	SR n/a SRI n/a	✓	✓	-	-	-	-	-
Sterling (Ontario)	SR n/a SRI n/a	✓	✓	-	-	-	-	-
Bavarian (Chicago)	SR n/a SRI n/a	✓	✓	-	-	-	-	-
French Grey	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Grenada White	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Midnight Sky	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Summer Wheat	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Winter Marvel	SR n/a SRI n/a	-	-	✓	✓	-	-	-
Onyx Black	SR n/a SRI n/a	-	-	-	-	-	-	✓



	STANDARD LAVANO	STANDARD SUBWAY	CLOSED END/ HALF PANEL
Bundle Type	SINGLE	SINGLE	BUNDLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	150 mm

FCFT PER	Bundle	61.52	61.52	54.18
	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29

PER BUNDLE	Layers	6.00	6.00	6.00
	Sections	-	-	-

LNFT PER	Bundle	129.50	129.50	104.86
	Unit	1.54	1.54	2.50


UNITS PER	SqFt	1.37	1.37	0.78
	Section	-	-	-
	Bundle	84.00	84.00	42.00

LBS PER	Layer	252.00	252.00	207
	Section	-	-	-
	Bundle	1,513	1,513	1,240

Colors	Reflectance	Stock	Stock	Stock
Fossil	SR n/a SRI n/a	✓	-	✓
Granite Fusion	SR n/a SRI n/a	✓	-	✓
Indiana Buff	SR n/a SRI n/a	✓	-	✓
Dark Charcoal	SR n/a SRI n/a	-	✓	✓
Opal Blend	SR n/a SRI n/a	-	✓	✓




SINGLE PANEL BUNDLE




6" STANDARD FASCIA PANEL
150 x 466 x 60mm
5 7/8 x 18 3/8 x 2 3/8"
84 Units/Bundle
.73 Sq.Ft./Stone

2 UNIT CLOSE-END BUNDLE



STANDARD FASCIA HALF PANEL
150 x 233 x 60mm
5 7/8 x 9 1/4 x 2 3/8"
42 Units/Bundle
.37 Sq.Ft./Stone



CLOSED-END FASCIA PANEL
150 x 530 x 60mm
5 7/8 x 20 7/8 x 2 3/8"
42 Units/Bundle
1.29 Sq.Ft./Stone

U-Cara® Multi-Face Wall System



	LARGE/CORNER/ PILLAR BACKER	STANDARD BACKER	UNIVERSAL BASE
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	OHIO	OHIO	OHIO
Thickness (mm)	150 mm	150 mm	55 mm

FCFT PER	Bundle	15.82	33.91	-
	Layer	3.96	11.30	-
	Stone	0.28	0.32	-

PER BUNDLE	Layers	4.00	3.00	10.00
	Sections	-	-	-


LNFT PER	Bundle	-	69.99	70.00
	Unit	-	0.67	1.17

UNITS PER	SqFt	3.54	3.10	-
	Section	-	-	-
	Bundle	56.00	105.00	60.00


LBS PER	Layer	498	773	282
	Section	-	-	-
	Bundle	1,992	2,320	2,816



COMPONENTS




**SURE TRACK
LARGE BACKER**
190 x 294 x 150mm
7 1/2 x 5 7/8 x 11 5/8"



**SURE TRACK
STANDARD BACKER**
190 x 150 x 150mm
7 1/2 x 5 7/8 x 5 7/8"

RECOMMENDED
BASE UNIT



UNIVERSAL BASE UNIT
355 x 482 x 55mm
14 x 19 x 2 1/4"
54 Units/Bundle

EXTRA
COMPONENTS




**SURE TRACK
CORNER INSERT**
L = 2"
50mm

Notes: Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

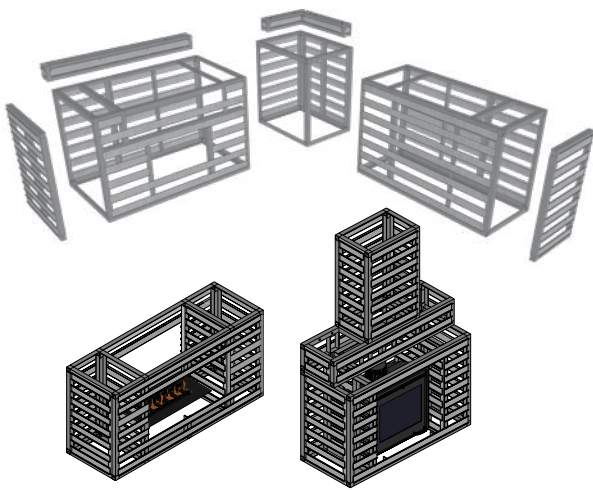

NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36"-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18⅝" x 18⅝")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS

U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES





APPLICATIONS

Wall Coping, Pillar

APPEARANCE

Surface Texture - Exposed

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	PILLAR CAP 28"	COPING
Bundle Type	SINGLE	SINGLE
Thickness (mm)	75 mm	60 mm

SQFT PER	Bundle	-	-
	Unit	-	-

FCFT PER	Bundle	-	-
	Layer	-	-
	Unit	-	-

LNFT PER	Bundle	-	42.00
	Unit	-	2.00

UNITS PER	Bundle	6.00	21.00
	SqFt	-	-


LBS PER	Unit	183	68
	Bundle	1,098	1,428

Colors	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓

While supplies last



SINGLE UNIT



PILLAR CAP
711 x 711 x 75mm
28 x 28 x 3"



COPING
609 x 355 x 60mm
24 x 14 x 2 3/8"

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CHAMFERED	FULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60 mm	60 mm

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	1.97	1.97
	Unit	47.24	47.24


UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Unit	63	63
	Sections	-	-
	Bundle	1,510	1,510


Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	✓
Oat Beige	SR n/a SRI n/a	✓	✓
Opal Blend	SR n/a SRI n/a	✓	✓



SINGLE UNIT



CHAMFERED
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle



FULLNOSE
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle

Notes: Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. All measurements are nominal. Contact Unilock for more information.

Brussels Fullnose™ & Double Fullnose™



APPLICATIONS

Pool Coping, Steps

APPEARANCE

Surface Texture - Tumbled, Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	FULLNOSE	DOUBLE FULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	OHIO	OHIO
Thickness (mm)	60 mm	70 mm

FCFT PER	Bundle	104.00	78.27
	Layer	10.00	19.57
	Stone	0.49	0.49

PER BUNDLE	Layers	4.00	4.00
	Sections	4.00	4.00

LNFT PER	Bundle	104.00	78.27
	Unit	0.5	0.50


UNITS PER	SqFt	0.5	0.5
	Section	52.00	40.00
	Bundle	208.00	160.00

LBS PER	Layer	737.75	594
	Section	737.75	594
	Bundle	2,951	2,376

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR .12 SRI 9	✓	✓
Limestone	SR .41 SRI 46	✓	✓
Sandstone	SR .41 SRI 46	✓	✓
Sierra	SR n/a SRI n/a	✓	✓
Mocha (Rittman)	SR n/a SRI n/a	✓	✓




SINGLE UNITS



FULLNOSE

150 x 300 x 60mm
5 7/8 x 11 7/8 x 2 3/8"

208 Units/Bundle



DOUBLE FULLNOSE

150 x 300 x 70mm
5 7/8 x 11 7/8 x 2 3/4"

160 Units/Bundle

Ledgestone™ Coping & Closed-End Coping



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature,
Fire Feature, Structural Wall, Steps

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 mm	70 mm	70 mm	70 mm	70 mm

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57


PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-




LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50

UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	56	193	199	282	279
	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	n/a	✓	✓	✓	✓	✓
Grey	n/a	✓	✓	✓	✓	✓



SINGLE UNITS					
	FULLNOSE COPING 610 x 305 x 60mm 24 x 12 x 2 3/8" 13 Units/Bundle .39 Fc.Ft./Stone	ROCKFACE COPING 610 x 305 x 70mm 24 x 12 x 2 3/4" 12 Units/Bundle .46 Fc.Ft./Stone	ROCKFACE CLOSED-END COPING 610 x 305 x 70mm 24 x 12 x 2 3/4" 12 Units/Bundle .46 Fc.Ft./Stone	ROCKFACE LARGE COPING 762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 Units/Bundle .57 Fc.Ft./Stone	ROCKFACE LARGE CLOSED-END COPING 762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 Units/Bundle .57 Fc.Ft./Stone

Notes: Coping is rock faced on the front and the back. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS

Pillar, Steps, Step Treads

APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	48" STEP	24" PILLAR CAP	29" PILLAR CAP	21½" FIRE PIT COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 mm	100 mm	100 mm	65 mm

FCFT PER	Bundle	5.91	3.28	-	-
	Layer	1.97	0.66	-	-
	Stone	1.97	0.66	-	-

PER BUNDLE	Layers	3.00	5.00	5.00	6.00
	Sections	-	-	-	-

LNFT PER	Bundle	12.00	10.04	-	-
	Unit	4.00	2.01	-	-

UNITS PER	SqFt	0.51	1.52	-	-
	Section	-	-	-	-
	Bundle	3.00	5.00	5.00	24.00

LBS PER	Layer	556	159	206	338
	Section	-	-	-	-
	Bundle	1,669	795	1,030	1,688

Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓	✓	✓
Grey	SR n/a SRI n/a	✓	✓	✓	✓



SINGLE UNIT




ROCKFACE FIRE PIT COPING

254 x 546 x 65mm
10 x 21½ x 2 ⅝"
24 Units/Bundle


8 pieces per Fire pit,
Outside Diameter 54"
Inside Diameter 34"

SINGLE UNITS

PILLAR CAP




ROCKFACE 24"
610 x 610 x 100mm
24 x 24 x 3 ⅞"
5 Units/Bundle
.66 Fc.Ft./Stone



ROCKFACE 28"
740 x 740 x 100mm
28 ½ x 28 ½ x 4"
5 Units/Bundle
.66 Fc.Ft./Stone

SINGLE UNITS

STEPS



ROCKFACE 48"
1220 x 610 x 150mm
48 x 24 x 5 ⅞"
3 Units/Bundle
1.97 Fc.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.

SienaStone™ Step



APPLICATIONS

Steps

APPEARANCE

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	48" STEP
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	185 mm

FCFT PER	Bundle	14.43
	Layer	4.81
	Stone	2.41

PER BUNDLE	Layers	3.00
	Sections	3.00

LNFT PER	Bundle	-
	Unit	-


UNITS PER	SqFt	0.42
	Section	2.00
	Bundle	6.00

LBS PER	Layer	1,140
	Section	1,140
	Bundle	3,420

Colors	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
Natural	SR n/a SRI n/a	✓



SINGLE UNITS



1200 x 500 x 185mm
47¼ x 19¾ x 7⅜"
6 Units/Bundle
2.41 Fc.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Pool Coping
Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Umbriano Mottled

TECHNICAL INFORMATION

Conforms to ASTM C 936
Eligible for LEED v4.1 credits

	CHAMFERED 24 x 14	FULLNOSE 24 x 14
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	47.20	47.20
	Unit	0.98	0.98


UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Unit	63	63
	Layer	252	252
	Bundle	1,510	1,510


Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓
Grenada White	SR .45 SRI 52	✓	✓
Midnight Sky	SR .17 SRI 15	✓	✓
Summer Wheat	SR .42 SRI 48	✓	✓
Winter Marvel	SR .35 SRI 38	✓	✓



SINGLE UNITS



CHAMFERED
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle



FULLNOSE
600 x 360 x 60 mm
24 x 14 x 2 3/8
24 Units/Bundle

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Standard / Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	COPING / STEP
Bundle Type	SINGLE
Plant Produced	OHIO
Thickness (mm)	70 mm

FCFT PER	Bundle	13.08
	Layer	2.18
	Stone	0.36

PER BUNDLE	Layers	6.00
	Sections	-

LNFT PER	Bundle	-
	Unit	-


UNITS PER	SqFt	2.75
	Section	-
	Bundle	36.00

LBS PER	Layer	353
	Section	-
	Bundle	2,118

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓



SINGLE UNITS



UNIVERSAL COPING / STEP

482 x 355 x 70mm

19 x 14 x 2¾"

36 Units/Bundle

.36 Fc.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

APPEARANCE

Surface Texture - Smooth

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CHAMFERED 36 x 19	FULLNOSE 36 x 19	CHAMFERED 24 x 14	FULLNOSE 24 x 14
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm	60 mm	60 mm

FCFT PER	Bundle	3.75	3.75	9.30	9.30
	Layer	-	-	11.63	11.63
	Stone	0.31	0.31	1.94	1.94

PER BUNDLE	Layers	6.00	6.00	8.0	8.0
	Sections	-	-	-	-

LNFT PER	Bundle	35.4	35.4	47.20	47.20
	Unit	2.9	2.9	0.98	0.98


UNITS PER	SqFt	-	-	-	-
	Layer	2.00	2.00	4.00	4.00
	Bundle	12.00	12.00	24.00	24.00

LBS PER	Unit	128.7	128.7	63	63
	Layer	257	257	252	252
	Bundle	1,544	1,544	1,510	1,510


Colors	Reflectance	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	✓	✓	✓	✓
Indiana Buff	SR.n/a SRI n/a	✓	✓	✓	✓
Sterling	SR.n/a SRI n/a	✓	✓	✓	✓
Linen Buff 	SR.n/a SRI n/a	✓	✓	✓	✓
Linen Grey 	SR.n/a SRI n/a	✓	✓	✓	✓




SINGLE UNITS




36 x 19 FULLNOSE
900 x 485 x 60 mm
35½ x 19 x 2¾
12 units/Bundle



24 x 14 FULLNOSE
600 x 300 x 60 mm
23 ⅝ x 11 ⅞ x 2¾
24 units/Bundle



36 x 19 CHAMFERED
900 x 485 x 60 mm
35½ x 19 x 2¾
12 units/Bundle



24 x 14 CHAMFERED
600 x 300 x 60 mm
23 ⅝ x 11 ⅞ x 2¾
24 units/Bundle

Notes: Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. All measurements are nominal. Contact Unilock for more information.

Sunset Fire Pit Kit



APPLICATIONS

Fire Feature

APPEARANCE

Surface Texture - Standard

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

	SQUARE W / INSERT	ROUND W / INSERT
Bundle Type	SINGLE	SINGLE
Thickness (mm)	300 mm	300 mm

DIAMETER (inch)	Outside	44.00	52.00
	Inside	28.00	34.00
	Insert	36.00	34.00

LAYER PER UNIT	3.00	3.00
UNIT PER LAYER	12.00	18.00
UNIT PER PALLET	36.00	54.00

LBS PER PALLET	1,545	1,145
----------------	-------	-------

Colors	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	✓	-
Limestone	SR n/a SRI n/a	✓	✓
River	SR n/a SRI n/a	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓
Sierra	SR n/a SRI n/a	✓	✓



SINGLE UNIT



SUNSET SQUARE W/INSERT
1100 x 1100 x 300mm
43 3/8 x 43 3/8 x 11 7/8"
Outside Dimensions



SUNSET ROUND W/INSERT
1300 x 1300 x 300mm
51 1/4 x 51 1/4 x 11 7/8"
Outside Dimensions

Notes: All measurements are nominal. Contact Unilock for more information.

Unilock Elements



TUSCANY

Large decorative accents adorn the top of the Tuscany fireplace. Brussels Fullnose™ is used to construct the ledges and mantle of the fireplace.





MODA (SPECIAL ORDER)

The Moda pre-built fireplace is constructed from Lineo™ Dimensional Stone and Series™ accent.

Tuscany Sierra with Copthorne® **

Moda (Lineo Dimensional Stone & Series)

TUSCANY FIREPLACE

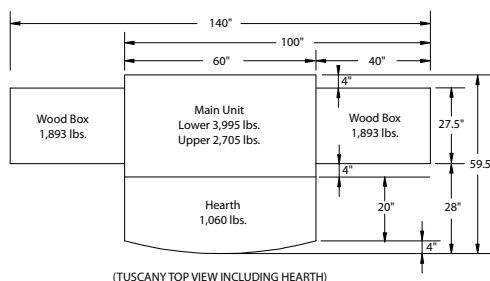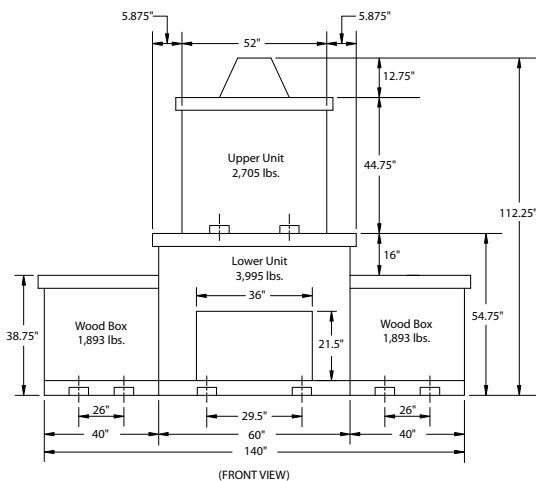

CUSTOM ACCENTS



Copthorne®

Courtstone®



Richcliff®

Umbriano®

UNILOCK ELEMENTS ARE AVAILABLE IN TUSCANY AND BARCELONA SERIES



FIREPLACE

Two piece set (base and chimney), and it comes with stainless fire box. 5,620 lbs



GRILL ISLAND

Available with OCS Grill, protective cover, and stainless double door insert. 3,800 lbs



HEARTH

Hearth with gentle curved front. 1,025 lbs



WOOD BOXES

Sold as a set of two and flank either side of the gas or standard fireplace. 3,750 lbs per set

Guarantee: The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

** Units and measurements may not be exactly as shown.



NEW from Unilock, the SkyView Roof Deck System is a comprehensive product lineup that includes adjustable pedestals, invisible wind uplift solutions, roof deck slabs, wood tile, and fiberglass grate. Together, these components offer unmatched flexibility, empowering designers to create elevated rooftop spaces that are visually stunning, durable and high-performing. The system's intuitive design also simplifies installation for contractors, ensuring efficiency without compromising quality. With SkyView, reimagine what's possible for roof deck design and construction.

SKYVIEW PEDESTAL SYSTEM


Unilock SkyView Pedestals are patent pending, fully adjustable structural supports for elevating paving materials. Our pedestals ensure unmatched flexibility, ease of installation and durability.



- 1/2" and 1" Waffles available for low profile applications.
- 10" Cores and Collars available for taller applications up to 31".

SKYVIEW GRATE

When this 48 x 48" fiberglass grate is placed on SkyView Pedestals, it creates a stable surface for installing smaller paver units on an elevated roof deck.

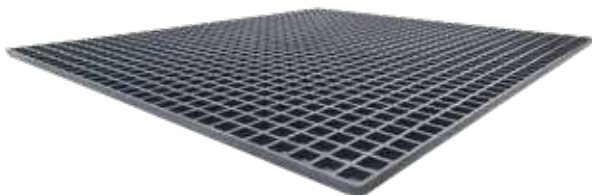


SKYVIEW WIND UPLIFT SYSTEM

When the below components are combined with the SkyView Pedestal System, they create a rafted paving surface with an invisible tie-down mechanism that resists wind uplift pressures without compromising project aesthetics.

1 | Wind Uplift Slabs

24 x 24" slabs featuring a kerfed undercut that spans the length of two opposing sides.



2 | Wind Uplift Kit

This 3-part kit is easily added to SkyView Pedestals to form a tie-down mechanism that works seamlessly with our Wind Uplift Slabs.



SCREW



KEYWAY
LOCKDOWN BAR



PUCK

SKYVIEW IPE WOOD TILE

Sustainably harvested and FSC certified, these 24 x 24" tiles have a dense hardwood composition that makes them perfect for use on SkyView Pedestals.



Ask your Unilock Representative about the made to order roof deck slab options available for your projects.

Paver Cleaners



ALLIANCE GATOR OIL & GREASE CLEANER

- Effective in removing oil and grease from the surface of concrete pavers and natural stones
- Easy to use - dissolves, dislodges and removes oil and grease



ALLIANCE GATOR EFFLORESCENCE CLEANER & SLURRY REMOVER

- Removes any efflorescence stains trapped in the concrete paver and natural stone pores
- Makes the pavers look more clean and vibrant



ALLIANCE GATOR RUST CLEANER

- Effective in removing rust from the surface of concrete pavers
- Contains no muriatic acid



ALLIANCE GATOR RUBBER, PAINT & TAR REMOVER

- Effective in removing rubber, paint and tar from the surface of concrete pavers and natural stone
- Easily washes off with water and is easy to use

Natural Stone Cleaners



UNICARE NATURAL STONE ACID CLEAN

1L and 5L

Removal of:

- Cement Staining
- Efflorescence
- Iron Oxide (Rust) Cement mortar
- Grout



UNICARE NATURAL POWER CLEAN

1L and 5L

Removal of:

- Oil & Grease
- Food Stains
- General Dirt & Mud
- Sap & certain plant stains
- Light cement contamination (on acid sensitive surfaces)



UNICARE BIOCLEAN

1L and 5L

Removal of:

- Black spot algae
- Green algae
- Plant stains from leaves, wood, trees, berries & flowers
- Organic staining from bark & compost, colored stains from food spillages, tea, coffee and wine

Natural Stone Sealers



UNICARE NATURAL STONE NATMATTE SEALER

1L and 5L

For Porous Stones

- No change of color
- No surface coating, sheen or shine at all
- Riven Sandstone & Smooth Sandstone



UNICARE NATURAL STONE NATCOLORENHANCE SEALER

1L and 5L

Color Enhancement For Porous Stones

- No surface coating, sheen or shine
- Breathable
- Lasts several years
- Easy to apply

Sealers



ALLIANCE GATOR WET LOOK SEALER

- Made from acrylic-based polymers
- Penetrates deep into concrete paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



ALLIANCE GATOR SATIN LOOK SEALER

- Made from acrylic-based polymers
- Penetrates deep into concrete paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion
- Low-gloss matte finish, solvent-based



ALLIANCE GATOR HIGH GLOSS

- 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone
- Penetrates deep into paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



ALLIANCE GATOR LOW GLOSS

- 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone
- Penetrates deep into paver and natural stone pores, reducing oil and dirt penetration
- Protects them from de-icing salt corrosion



SUREBOND 1300 JOINT SAND STABILIZING SEALER - MATTE FINISH

- Seals surface & hardens joint sand, while protecting the sealer film from mold, moss & algae
- Reduces sand washout, weeds & insect infestation
- Locks in a clean, natural look & matte finish.
- Product is breathable, designed for immediate application and is water-based; moisture or efflorescence will not get trapped
- Approximate Coverage: 80-120 sq.ft

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Sealers continued



SUREBOND 7700 JOINT STABILIZING SEALER - GLOSS FINISH WITH ANTIFUNGAL PROTECTION

- Seals the surface and bonds joint sand between interlocking concrete pavers.
- Protects colored, stained and exposed aggregate concrete from staining.
- Resists acid, salt, other corrosives and weathering.
- Stabilizing sealer, water-based, single component and epoxy-modified; exceeds all VOC and EPA standards.
- Non-hazardous with the consistency of water; milky white in appearance when applied, dries crystal clear creating a semi-gloss finish.



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

- An advanced premium acrylic sealer that will not yellow under exposure to sunlight.
- A 2 in 1 product; protects the substrate surface and stabilizes jointing sand at the same time.
- Specially formulated with antifungal agents designed to help inhibit the growth of mold, fungi and moss on horizontal pavement surfaces.
- Forms a tenacious bond to the concrete or masonry surface.
- Wet look, rain safe in 90 minutes, water-repellant, breathable, solvent-based.

Sands



TECHNISEAL HP NEXTGEL 50 lb/bag

- Colors: Granite & Prairie Tan
- 56 bags/skid (2860 lbs/skid)
- Dust & haze-free, fast-setting polymeric sand.
- Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



TECHNISEAL NOCO STORM (40 LB)

- Colors: Tan, Granite & Black
- Multi-weather.
- For the durable jointing of pavers, natural stone, large concrete slabs, and porcelain.
- Permeable, efficient, reusable.
- Perfect for walkways, pool decks, patios, and non-vehicular areas.
- Ready-to-use, no mixing required.



POLYBIND™ HP SAND

- Colors: Nevada, Tan & Oxford Grey.
- Designed for paver joints up to a maximum of 1 inch.
- Unique mixture of polymer binders and calibrated sand.
- Installation almost identical to using regular paver joint sand, except for the application of water; once set, it becomes very firm and locks between the paver joints, maintaining pavers securely in place.
- Equally effective on both horizontal & sloped surfaces.
- Packaging: 50 lb bag 56 bags/skid.
- Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.

Sands continued



POLYBIND™ COMPLETE SAND

- Colors: Nevada, Tan & Oxford Grey
- Specifically designed for drainage and non-drainage base systems.
- Can be used with concrete pavers, wetcast and natural stones for a variety of uses including pool sides, patios, paths, driveways, parking spaces, etc.
- Sets above the freezing temperature 32°F and can be used for joints up to a maximum of 1.5 in.
- Packaging: 50 lb bag 56 bags/skid.
- Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.



POLYBIND G2 SAND - NO DUST • HAZE FREE • NO BLOWER • ONE WATERING

- Colors: Nevada & Oxford Grey
- Made with calibrated sand that is mixed with sophisticated intelligent polymers, which neutralize haze and dust; application is now dust free and haze free.
- No blower needed and the intelligent polymeric sand requires only one watering.
- Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc.
- Sets above the freezing temperature 32°F and can be used for joints up to a maximum of 2 in.
- Packaging: 50 lb bag 56 bags/skid
- Coverage: 65-85 sq.ft. per bag for narrow joints/larger joints require more sand.



POLYBIND G2 COMPLETE SAND - NO DUST • HAZE FREE • NO BLOWER • ONE WATERING

- Designed for paver joints up to maximum of 4".
- Drainage & non-drainage applications (overlays).
- The cleanest, fastest and easiest polymeric sand installed in the industry.
- Can be used with concrete pavers, wetcast & natural stones, and is recommended for use in patios, pool decks, walkways, driveways, etc.
- Packaging: 50 lb bag 56 bags/skid
- Coverage: 65-85 sq.ft./ bag for narrow joints/larger joints require more sand; 58-76 sq.ft./ bag for narrow joints/larger joints need more sand.



POLYBIND DUST

- Colors: Tan & Grey
- Designed for natural stone joints 1/2" to 4".
- A unique mixture of polymer binders and calibrated crushed stone.
- Once set, becomes very firm and locks between the stone joints, maintaining a bond that holds the stones securely in place.
- Equally effective on both horizontal and sloped surfaces.
- Packaging: 50 lb bag 56 bags/skid
- Coverage: 20-30 sq.ft. per bag for joints 1"-2" wide and stones approximately 2" thick



ALLIANCE EUROSTONE BOND

- Colors: Slate Grey.
- The first polymeric sand specifically designed for drainage and non-drainage base systems.
- Can be used with natural stones and cobblestone.
- Sets above the freezing temperature (0°C / 32°F) and can be used for joints up to a maximum of 35mm/ 1".
- Packaging: 50 lb bag 56 bags/skid.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Sands continued



ALLIANCE GATOR NITRO SAND

- Colors: Beige, Grey, Black & Silver
- Ready-to-use mixture of calibrated sand and resins which cure when exposed to air, harden from top to bottom of the joint.
- Can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width; minimum jointing depth is 1" (25mm).
- Packaging: 40 lb bucket • 48 buckets/skid.
- Coverage: 10-56sf = 1 bucket depending on joint size.



SEK POLYSWEEP POLYMERIC SAND

- Colors: Tan & Grey
- Designed to keep sand in the joints by creating a semi-solid joint.
- A blend of native sands conforming to ASTM-C144 and binders specially formulated to allow the joints to expand and contract with the elements (ie. heat, cold & freeze/thaw cycles).
- Prevents sand erosion from the pavement joints caused by rain and other water run-off, proven to produce less hazing.
- Also deters weed growth and reduces overall pavement maintenance.
- Max width: 2.5cm (1"); a larger joint width is acceptable where pavers intersect. Min depth: 3cm (1.25").
- Packaging: 50 lb bag, 56 bags / skid (2,860 lbs / skid)
- Coverage: Courtstone - 1 bag covers approx. 25sq.ft.

Note: Extra care must be exercised when using with Courtstone®, Copthorne®, Richcliff® & Town Hall®. This product is not recommended for use with Il Campo®, Series™ & Umbriano®.



GATOR NITRO-X FINE JOINT **NEW**

Black | Grey | Gunmetal | Taupe | Platinum | Vanilla
27.5 lbs Pail - 48 Pails/Pallet

- Rapid Flow Technology
- Fast and simple installation
- Xtra Fine gradation jointing sand
- Xtra Low permeability
- Xtra Strength from top to bottom ***
- Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)****
- 5-year limited warrantywidth.

*** Gator Nitro-X Fine Joint Sand will harden from top to bottom up to 2 3/8" (60 mm).

**** Ensure there is ABSOLUTELY NO paver, porcelain tile or stone movement prior to installation to prevent joint cracking.



SUREBOND JOINTING SAND

- Colors: Tan & Grey
- Will properly complete the interlocking of segmental pavers because it is clean, angular and meets ASTM-C144 specifications.
- More stable in the paver joints and has optimal gradation to ensure long term performance of the pavement system.
- Recommended for joints up to 3/4" • Washed, screened & dried
- Packaging: 50 lb bag

SAND RECOMMENDATIONS BY PRODUCT	Polybind HP G2	Polybind Complete Sand G2	Polysweep Polymeric Sand	Unicare® Easy Pro®	Eurostone Eurostone Bond	
PAVERS	For joints up to 1/8" May be sealed. Tan color Non-binding sand	For joints up to 1" May be sealed. Available in Tan or Grey Binding sand	For joints up to 4" May be sealed. Available in Tan or Grey Binding sand	For joints up to 1" May be sealed. Available in Tan or Black Binding sand	May be sealed. Available in Slate Grey	N/R - Not Recommended
						✓ Recommended
Copthorne®	✓	✓	✓*	✓	N/R	
Courtstone®	N/R	N/R	N/R	N/R	✓	✓* These pavers have a very narrow or slightly angled edge (chamfer), limiting sand penetration in the joint and causing possible weak bonding areas. The life cycle performance could be affected.
Il Campo®	N/R	N/R	N/R	N/R	N/R	
Richcliff®	✓	✓	✓*	✓	N/R	
Series™	N/R	N/R	N/R	N/R	N/R	
Town Hall®	✓	✓	✓	✓	N/R	
Umbriano®	✓	✓	N/R	N/R	N/R	
Tumbled Pavers	✓	✓	✓	N/R	N/R	
Standard Pavers	✓	✓	✓	✓	N/R	

IMPORTANT NOTICE

1. **DO NOT USE** Polymeric Jointing Sand on the following products: Series™ Il Campo®

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. Contact your local Unilock office for recommended sealants and application specifics.

2. **EXTRA CARE** must be exercised when using Polymeric Sand on the following products:

Courtstone®

Copthorne®

Richcliff®

Town Hall®

Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

3. **IMPORTANT COMPACTION NOTICE:** Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Unilock will not accept responsibility for alternate suppliers of polymeric sand, jointing sand, cleaners and sealers.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Adhesives



SUREBOND SB-10 ADHESIVE

ADH002 28oz tube; 12/Case; 60 Cases/skid
(Conforms to UN-STD. 1804, ASTM 2339-70 & FHA UM-60)

Surebond SB-10 adhesive is a fast set-up, quick curing, superior strength, structural grade hardscape adhesive. Adheres well in extreme conditions such as temperatures ranging from 0° to 100° F, frozen and/or damp substrates.

Light Tan • Low odor • VOC compliant • 900 psi



ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea).
RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea).

- Bonds permanently in 24 hours.
- Material may be repositioned for up to 30 minutes.
- Works in temperatures above 32°F.
- 850 psi in 24 hrs (1000 psi in 7 days).



TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

ADH048 (24 oz)
24 oz. Canister = 600 linear feet at 3/8" bead (12/case)

An innovative super-strength foam adhesive that bonds a wide range of construction products with an application time up to 50% faster than with conventional tube adhesives. Materials are bonded in just 8 minutes and adhesive is fully cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



TECHNISEAL STRUCTURE BOND™ GUN II

TOOL378 1 Dispenser (12/case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user-fatigue, with total control on product flow. The gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.



TECHNISEAL STICKY STONE

RS-ADH055 20.3 oz sausage; 15 sausages/case;
66 cases/skid

- Professional-grade vertical hardscape adhesive.
- Perfect for outdoor kitchens, fire pits & columns, etc.
- Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 linft.
- Applies mess-free and easily with gun applicator.



STICKY STONE GUN

RS-T00L557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickystone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.



TECHNISEAL STRUCTURE BOND™ FOAM CLEANER

CLN093 (16 oz) 1 Canister = (12/case)
Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. Specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will dissolve any spill, drip or adhesive residue.

X & T Slab Spacers

X & T SLAB SPACERS

- 250 per bag
- X & T bagged separately
- X spacers 2" x 2" (RS-ACC237)
- T spacers 2" x 1" (RS-ACC236)



Unilock recommends using slab spacers when installing Arcana on an open grade surface. "T" spacers are needed for running bond patterns, "X" spacers are needed for stack bond patterns. Please contact your sales manager for more information.

Edging



PERMA EDGE PAVER EDGING

- Designed to float & flex with the sub base and not work independently like standard edging & spikes.
- Quick & easy to install, typically cutting edging install time down by 80%.
- Stays under the soil/mulch grade invisible edging.
- Combats the freeze/thaw cycles in cold weather; won't deteriorate in moist/humid conditions.
- Coverage per container; yields approx. 25-30 linear feet of edging per bucket.
- Packaging: 75 lb container / 34 kg bucket 35 / skid.



PERMAPACK

- Extreme flexural strength
- Water stop technology
- Shrink control
- Void Reduction
- Macro Synthetic Fibers
- Coverage:

Open graded base: 1 Perma Pak/50-60# bag of concrete will produce 12'-16' open graded/clear base (chip bedding)

Dense Base: 1 Perma Pak/50-60# bag of concrete will produce 17'-21' dense/crushed base (sand bedding)

- Packaging:
- 1 Perma Pak (1 lb. per packet)
1 Box of Perma Paks (30 packets per box - 31 lbs.)
1 Skid (32 boxes/960 packets - 1030 lbs.)



ALLIANCE GATOR XTREME EDGE

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Packaging: 50 lb bag / 56 bags per skid.
- Coverage: 20-25 sqft coverage per bag for a 60mm paver.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Edge Restraints



PERMEDGE PERMEABLE PAVER EDGING RS-EDGE033

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.

Product Information:

8' (96") length pcs.
Weight per Unit: 2.5 lbs.
Pieces per Pallet: 64 (72 ln. ft.)
Freight Class: 300
Pallet Weight: 210 lbs.
Pallet Size: 98" l x 48" w x 50" h



Spikes

- 10" Round Spikes.
- About 150 spikes per case.
- **Sold in full cases only.**

SNAPEDGE - ONE-PIECE EDGING THAT DOES IT ALL!

- Only one part required for straight runs or curved installations.
- Built-in connector fastens one piece to the next - convenient 96" size, easy to transport.
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning.
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/ clay pavers.
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging.



Product Information:

6'8" (80") length pcs.
Sidewall: 1 3/8"
Pieces per Pallet: 672 (5,376 ln. ft.)
Pieces per Bundle: 24 (192 ln. ft.)
Bundles per Pallet: 28
Pallet Weight: 1395 lbs.
Pallet Size: 98" l x 48" w x 50" h

Drainage, Separation & Reinforcement



UNILOCK DRIVEGRID™ SYSTEM

- 120' x 13' Roll,
1,572 Sq.Ft./Roll
56 lbs/Roll



GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging: • 4' x 50' / 16 rolls per box
• 6' x 50' / 20 rolls per pallet



GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging: • 3' x 100' / 4 roll package
• 6' x 100' / 12 roll package



GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging: • 4' x 100' / 4 roll package
• 6.25' x 300' / 12 roll package



GATOR FABRIC POLYSPUN 20 **SPECIAL ORDER**

Gator Fabric Polyspun 20 geotextile is specially formulated to resist deterioration in garden and landscape applications. It creates a barrier to reduce weed growth and allows water, fertilizer and air to pass through.

Packaging: • 3' x 50' / 16 rolls per case / 64 rolls per skid
• 3' x 100' / 9 rolls per case / 36 rolls per skid
• 4' x 100' / 9 rolls per case / 36 rolls per skid
• 6' x 100' / 30 rolls per case / 36 rolls per skid

Tools & Accessories



Install up to 700 sq. ft. per hour!

- Access tight or narrow areas.
- Eliminate the need for a forklift on site.
- Reduce labor costs.
- Reduce shoulder, hand & knee pain and injury.
- Improve your bottom line.

Contact your local rep for details



GATOR TILE SYSTEM

Contact Unilock for more information.



RS-ACC074-1



RS-ACC087



RS-EDGE061



RS-ACC088



MODEL
MINI P



MODEL P



MODEL L



ALL TERRAIN
PALLET MOVER



PISA XL LIFTING TONG

- The Pisa XL tong makes it easier to lift and place units, especially on the base course.
- The action of lifting the handle secures the lifter and makes for easy, balanced lifting and placement.



U-LEVEL™

- Easy to use.
- Accurate readings.
- Low maintenance.
- Works in difficult locations.
- Large working area.

A PRECISION TOOL NO HARDSCAPER SHOULD BE WITHOUT

CALCULATIONS

AREA OF A CIRCLE

Radius (in.)	18	21	24	27	30	33	36	39	42	45	48	51	54	57
Radius (ft.)	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.235	4.50	4.75
Square Feet	7.07	9.62	12.56	15.90	19.63	23.75	28.26	33.17	38.47	44.16	50.24	56.72	63.59	70.85
Circumference (in.)	113.04	131.88	150.72	169.56	188.40	207.24	226.08	244.92	263.76	282.60	301.44	320.28	339.12	357.96
Circumference (Ft.)	9.42	10.99	12.56	14.13	15.70	17.27	18.84	20.41	21.98	23.55	25.12	26.69	28.26	29.83
Area of a circle = 3.14 x Radius x Radius														
Circumference = 6.28 x Radius														

AREA CONVERSION CHART

Square Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Meter	0.09	0.19	0.28	0.39	0.46	0.56	0.65	0.74	0.84	0.93	1.02	1.11	1.21	1.30
Square Meter	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Square Feet	10.76	21.53	32.29	43.06	53.82	64.58	75.35	86.11	96.88	107.64	118.40	129.17	139.93	150.69
Cubic Yard	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Cubic Feet	27	54	81	108	135	162	189	216	243	270	297	324	351	378
Area Square = Length x Width														
Area Triangle = 1/2 Base x Height														

LINEAR DISTANCE CONVERSION CHART

Inches	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Centimeters	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	25.40	27.94	30.48	33.02	35.53
Centimeters	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Inches	0.39	0.79	1.18	1.57	1.97	2.36	2.76	3.5	3.54	3.94	4.33	4.72	5.12	5.51
Feet	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Meters	0.30	0.61	0.91	1.22	1.52	1.83	2.13	2.44	2.74	3.05	3.35	3.66	3.96	4.25
Meters	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Inches	39.37	78.74	118.11	157.48	196.85	236.22	275.59	314.96	354.33	393.70	433.07	472.44	511.81	551.18
Feet	3.28	6.56	9.84	13.12	16.40	19.69	22.97	26.25	29.53	32.81	36.09	39.37	42.65	45.93

WEIGHT CONVERSION CHART

Pounds	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Kilograms	0.45	0.91	1.36	1.81	2.27	2.72	3.18	3.63	4.08	4.54	4.99	5.44	5.90	6.35
Kilograms	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Pounds	2.20	4.41	6.61	8.82	11.02	13.23	15.43	17.64	19.84	22.05	24.25	26.46	28.66	30.86

Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

UNILOCK FINISHES

When considering the finish, think about the look you are trying to achieve as well as practical performance. From traditional smooth and flagstone, to enhanced surfaces, modern granite looks and timeworn patina, Unilock offers it all.

SMOOTH FINISH



Sometimes, simple is best. A smooth surface suits contemporary styles and is available in a wide variety of shapes for paving and verticals.

FLAGSTONE FINISH



Popular for centuries, a flagstone finish never fails to add warmth to outdoor spaces.

ANTIQUED FINISH



A variety of methods are used to achieve this distressed finish, but in every case, it lends a relaxed, rustic vibe.

TIMEWORN



Our exclusive Elegance line offers the look of centuries-old cobblestone, brick, and natural stone with unsurpassed product durability.

BRUSHED FINISH




Only Unilock offers Il Campo®, a unique surface enhanced with graphically interesting etched lines. This finish has long been a favorite of commercial designers.

UMBRIANO




Umbriano is an exclusive finish only available from Unilock with color and granite particles that are randomly dispersed to achieve a unique mottled surface that is reminiscent of granite.

EXPOSED GRANITE

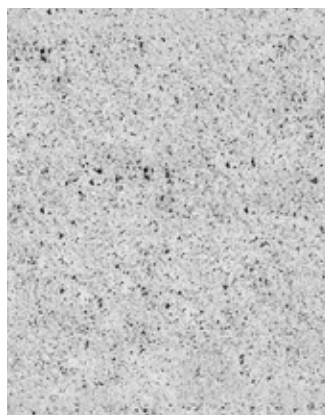

Granite, Quartz and Marble particles are embedded in the product's surface and then revealed using additional processing methods.

ENHANCED SURFACE

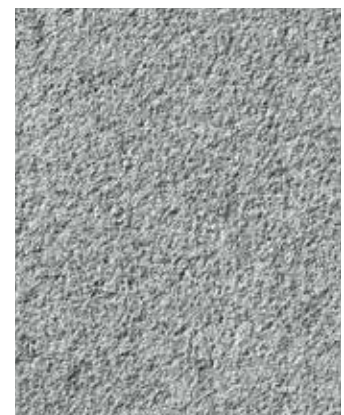

The surface of these products is enhanced using a special process to reveal a variety of distinctive colors and textures.

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.



Scan for full Guarantee details

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2025 Hengestone Holdings, Inc.

UNILOCK[®]

COLLECTIONS

Beacon Hill[™]

Coping — Wall

Pavers
& Slabs

Umbriano

Wall

Coping

Pavers
& Slabs



DESIGNED TO TAKE THE GUESSWORK OUT OF PRODUCT SELECTION.

Streamline the process by offering pavers, walls, steps and coping that will work well together. **Scan to explore our full range of collections.**



TRANSFORMING
HARDSCAPES

LET'S BUILD YOUR BUSINESS TOGETHER.

CHICAGO
(630) 892-9191

MILWAUKEE
(262) 742-3890

KANSAS
(913) 417-7985

BOSTON
(508) 278-4536

NEW YORK
(845) 278-6700

MID-ATLANTIC
(202) 798-2060

MICHIGAN
(248) 437-7037

ONTARIO
(416) 646-9000

QUÉBEC
(450) 546-2797

**CINCINNATI / KY
/ TN / IN**
(513) 202-0219

**OHIO / WESTERN PA
/ WNY & CNY**
(330) 927-4000



UNILOCK.COM | 1-800-UNILOCK